



IS66WVH32M16EALL/BLL

IS67WVH32M16EALL/BLL

512Mb

**1.8V/3.0V HYPERRAM with Extended-IO
(x16)**

ADVANCED DATA SHEET

512Mb HyperRAM™ with Extended-IO (x16)

ADVANCED INFORMATION

Overview

The IS66/67WVH32M16EALL/BLL are integrated memory device containing 512Mbit Pseudo Static Random Access Memory, organized as 32M words by 16 bits. The device supports a HyperBus interface, Very Low Signal Count (Address, Command through 8 DQ pins, and data through 16 DQ pins), Hidden Refresh Operation, and Automotive Temperature Operation, designed especially for Mobile and Automotive applications.

Key Features

HyperBus™ Low Signal Count Interface

- 1.7 to 2.0V (1.8V typ.) and 2.7 to 3.6V (3.0 V typ.) interface support
- Single-ended clock (CK) – 20 bus signals
- Optional differential clock (CK, CK#) – 21 bus signals
- Chip Select (CS#)
- 16-bit data bus (DQ [15:0])
- Hardware reset (RESET#)
- Bidirectional Read-Write Data Strobe (RWDS [1:0])
- Output at the start of all transactions to indicate refresh latency
- Output during read transactions as Read Data Strobe
- Input during write transactions as Write Data Mask

High Performance

- 250MHz (1.8V)/200MHz(3.0V) maximum clock rate
- Double-Data Rate (DDR) - two data transfers per clock
- Data throughput up to 1000MBps(1.8V)/800MBps(3.0V)

- Configurable Burst Characteristics
 - Wrapped burst lengths:
 - 16 words (8 clocks)
 - 32 words (16 clocks)
 - 64 words (32 clocks)
 - 128 words (64 clocks)
 - Linear burst
 - Hybrid burst - one wrapped burst followed by linear burst
 - Wrapped or linear burst type selected in each transaction
- Configurable output drive strength
- Power modes
 - Hybrid Sleep mode
 - Deep Power Down
- Memory array refresh
 - Partial array (1/8, 1/4, 1/2, and so on)
 - Full array
- Temperature Grade
 - Industrial: -40°C to +85°C
 - Auto (A1) Grade: -40°C to +85°C
 - Auto (A2) Grade: -40°C to +105°C
- Package
 - 49- ball FBGA
 - Green Package (RoHS Compliant, Halogen-Free) and TSCA Compliant

Copyright © 2025 Integrated Silicon Solution, Inc. All rights reserved. ISSI reserves the right to make changes to this specification and its products at any time without notice. ISSI assumes no liability arising out of the application or use of any information, products or services described herein. Customers are advised to obtain the latest version of this device specification before relying on any published information and before placing orders for products.

Integrated Silicon Solution, Inc. does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of the life support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications unless Integrated Silicon Solution, Inc. receives written assurance to its satisfaction, that:

- a.) the risk of injury or damage has been minimized;
- b.) the user assume all such risks; and
- c.) potential liability of Integrated Silicon Solution, Inc is adequately protected under the circumstances

Performance Summary

Read Transaction Timings	
Maximum Clock Rate (1.8V)	250 MHz
Maximum Access Time (1.8V)	28ns
Maximum Clock Rate (3.0V)	200 MHz
Maximum Access Time (3.0V)	35 ns

Maximum Current Consumption		
V _{CC} Active Read Current	1.8V, 250MHz	40 mA
	3V, 200MHz	35 mA
V _{CC} Active Write Current	1.8V, 250MHz	40 mA
	3V, 200MHz	35 mA
Standby (CS# = High, 1.8V, 105 °C)		1800 uA
Standby (CS# = High, 3V, 105 °C)		1800 uA
Deep power down (1.8V, 105 °C)		50 uA
Deep power down (3V, 105 °C)		80 uA

Logic Block Diagram

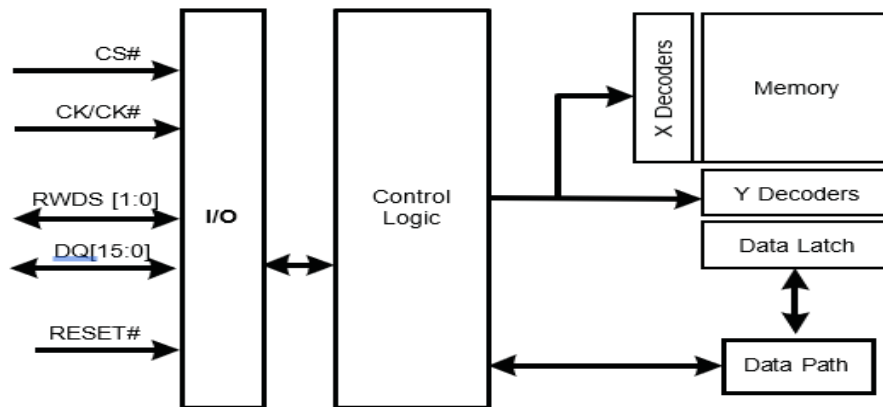




TABLE OF CONTENTS

Overview.....	2
Performance Summary	3
TABLE OF CONTENTS	4
1. General Description	6
1.1 HYPERBUS™ extended-IO interface	6
2. HyperRAM Product Overview	9
2.1 HyperBus extended-IO interface.....	9
3. HyperRAM Signal Descriptions.....	10
3.1 Input/Output Summary	10
3.2 Command/Address Bit Assignments	11
3.3 Read Transactions (Memory array and registers)	14
3.4 Write Transactions (Memory array write).....	16
3.5 Write Transactions without Initial Latency (Register Write)	18
4. Memory Space	19
5. Register Space.....	20
5.1 HYPERBUS extended-IO interface.....	20
5.2 Register Space Access	21
5.3 Device Identification Registers.....	22
5.3.1 Density and Row Boundaries.....	22
5.4 Configuration Register 0	23
5.4.1 Wrapped Burst	24
5.4.2 Hybrid Burst	24
5.4.3 Initial Latency	25
5.4.4 Fixed Latency.....	26
5.4.5 Driver Strength	26
5.4.6 Deep Power Down	26
5.5 Configuration Register 1	27
5.5.1 Master clock type	27
5.5.2 Partial array refresh.....	27
5.5.3 Hybrid sleep (HS).....	28
5.5.4 Distributed Refresh Interval	28
6. Interface States	29
6.1 Power Conservative Modes	29
6.1.1 Interface Standby	29
6.1.2 Active Clock Stop	29
6.1.3 Hybrid sleep	30



6.1.4 Deep power down	31
7. Interface States	32
8. POWER-UP/POWER-DOWN	33
8.1 Power-Up Initialization	33
8.2 Power-Down	34
8.3 Hardware Reset	36
9. ELECTRICAL CHARACTERISTICS	37
9.1 ABSOLUTE MAXIMUM RATINGS ⁽³⁾	37
9.2 Latch up Characteristics	37
9.3 Operating Ranges	38
9.3.1 Temperature Ranges	38
9.3.2 Power Supply Voltages	38
9.3.3 Input Signal Overshoot	38
9.4 DC Characteristics	39
9.5 Capacitance Characteristics	41
10. Timing Specifications	42
10.1 Key to Switching Waveforms	42
10.2 AC Test Conditions	42
10.3 CLK Characteristics	43
10.4 AC Characteristics	45
10.4.1 Read Transactions	45
10.4.2 Write Transactions	48
11. Physical Interface	49
11.1 FBGA 49-Ball 7 x 7 Array Footprint	49
12. Package Information	50
13. ORDERING INFORMATION - Valid Part Numbers	51
14. ORDERING TABLE	52

1. General Description

The ISSI 512Mbit HyperRAM™ device is a high-speed CMOS, self-refresh Dynamic RAM (DRAM), with a HyperBus extended-IO.

The Random Access Memory (RAM) array uses dynamic cells that require periodic refresh. Refresh control logic within the device manages the refresh operations on the RAM array when the memory is not being actively read or written by the HyperBus extended-IO interface master (host). Since the host is not required to manage any refresh operations, the DRAM array appears to the host as though the memory uses static cells that retain data without refresh. Hence, the memory can also be described as Pseudo Static RAM (PSRAM).

Because the DRAM cells cannot be refreshed during a read or write transaction, there is a requirement that the host not perform read or write burst transfers that are long enough to block the necessary internal logic refresh operations when they are needed. The host is required to limit the duration of transactions and allow additional initial access latency, at the beginning of a new transaction, if the memory indicates a refresh operation is needed.

1.1 HYPERBUS™ extended-IO interface


HyperBus extended-IO is a low signal count, Double Data Rate (DDR) interface, that achieves high speed read and write throughput. The DDR protocol transfers two 16-bit data words per clock cycle on the DQ [15:0] input/output signals. A read or write data transaction on HyperBus extended-IO consists of a series of 32-bit wide, one clock cycle data transfers at the internal HyperRAM core with two corresponding 16-bit wide, one-half-clock-cycle data transfers on the DQ signals. All inputs and outputs are LV-CMOS compatible. Ordering Part Number (OPN) device versions are available for core (V_{CC}) and IO buffer (V_{CCQ}) supplies of either 1.8V or 3.0V (nominal).

Command, address, and data information is transferred over the 16 HyperBus extended-IO DQ[15:0] signals. The clock (CK,CK#) is used for information capture by a HyperBus extended-IO slave device when receiving command, address, or data on the DQ signals. Command or Address values are center aligned with clock transitions.

DQ[7:0] transfers command and address during command/address (CA) period. DQ[15:8] is ignored by the device during CA period, but host must drive DQ[15:8] all to “High” or “Low” during CA period.

Every transaction begins with the assertion of CS# and Command-Address (CA) signals, followed by the start of clock transitions to transfer six CA bytes, followed by initial access latency and either read or write data transfers, until CS# is deasserted.

Figure 1.1 Read Transaction, Single Initial Latency Count

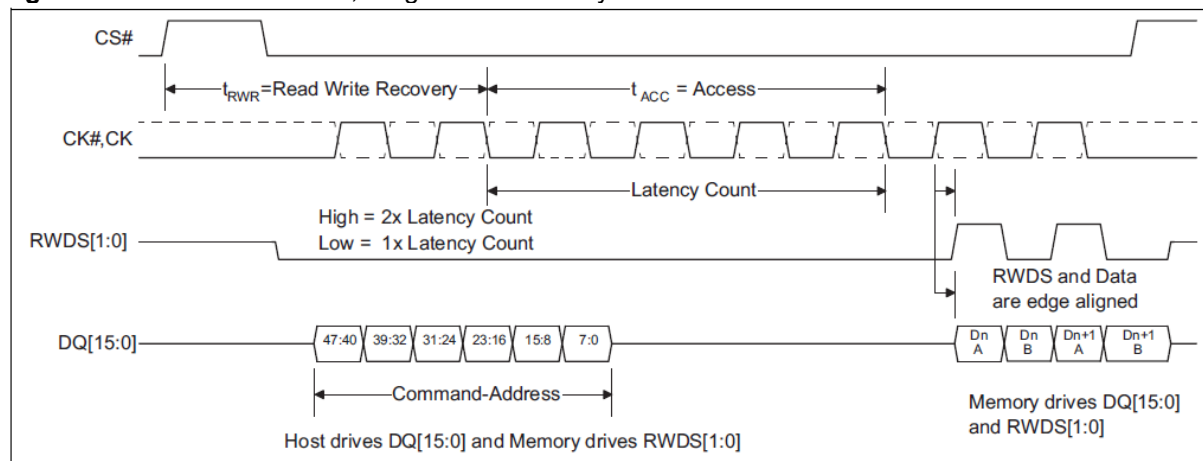


The RWDS is a bidirectional signal that indicates:

- when data will start to transfer from a HyperRAM device to the master device in read transactions (initial read latency)
- when data is being transferred from a HyperRAM device to the master device during read transactions (as a source synchronous read data strobe)
- when data may start to transfer from a master device to HyperRAM device in write transactions (initial write latency)
- data masking during write data transfers

During the CA transfer portion of a read or write transaction, RWDS acts as an output from a HyperRAM device to indicate whether additional initial access latency is needed in the transaction.


During read data transfers, RWDS is a read data strobe with data values edge aligned with the transitions of RWDS.

Figure 1.2 Read Transaction, Additional Latency Count

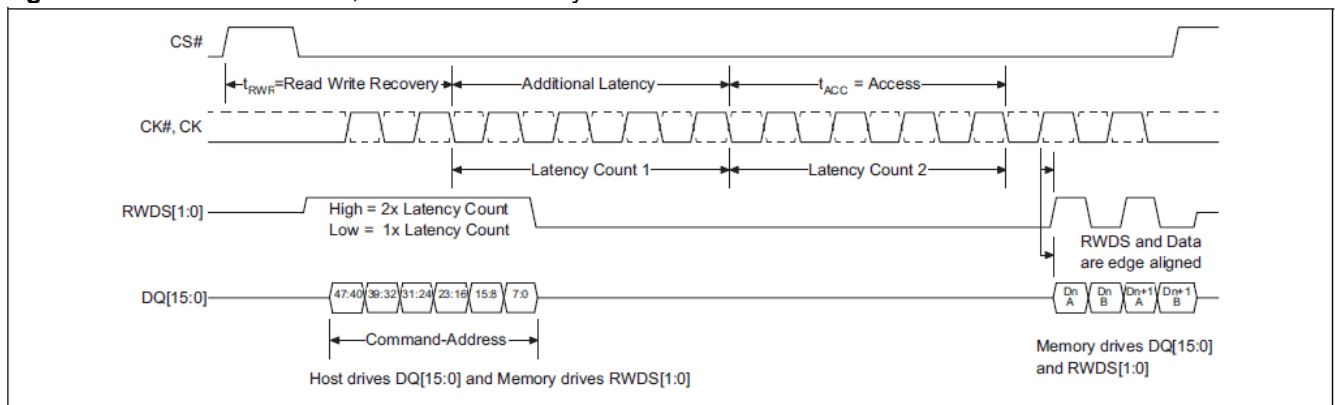


During write data transfers, RWDS indicates whether each data byte transfer is masked with RWDS High (invalid and prevented from changing the word location in a memory) or not masked with RWDS Low (valid and written to a memory). Data masking may be used by the host to 16-bit align write data within a memory or to enable merging of multiple non-word aligned writes in a single burst write. During write transactions, data is center aligned with clock transitions.

Figure 1.3 Write Transaction, Single Initial Latency Count

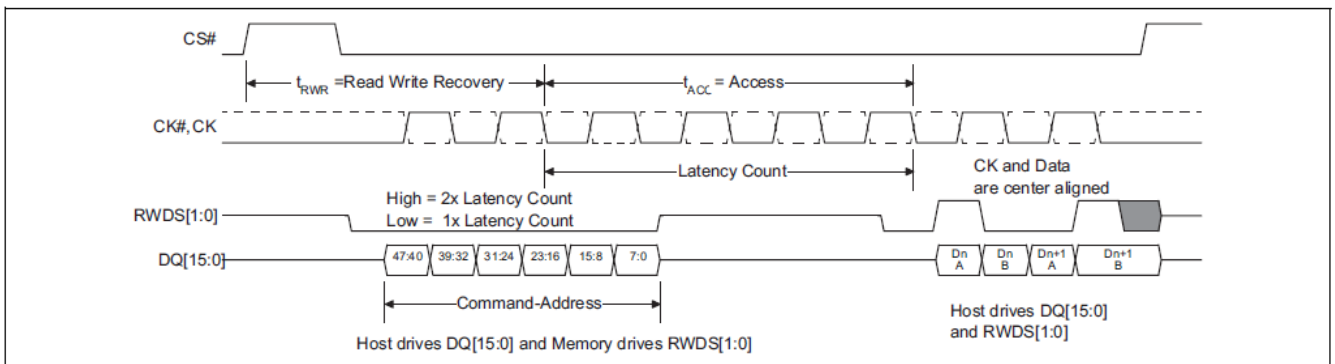

Read and write transactions are burst oriented, transferring the next sequential 32-bits during each clock cycle. Each individual read or write transaction can use either a wrapped or linear burst sequence.

Figure 1.4 Linear Versus Wrapped Burst Sequence

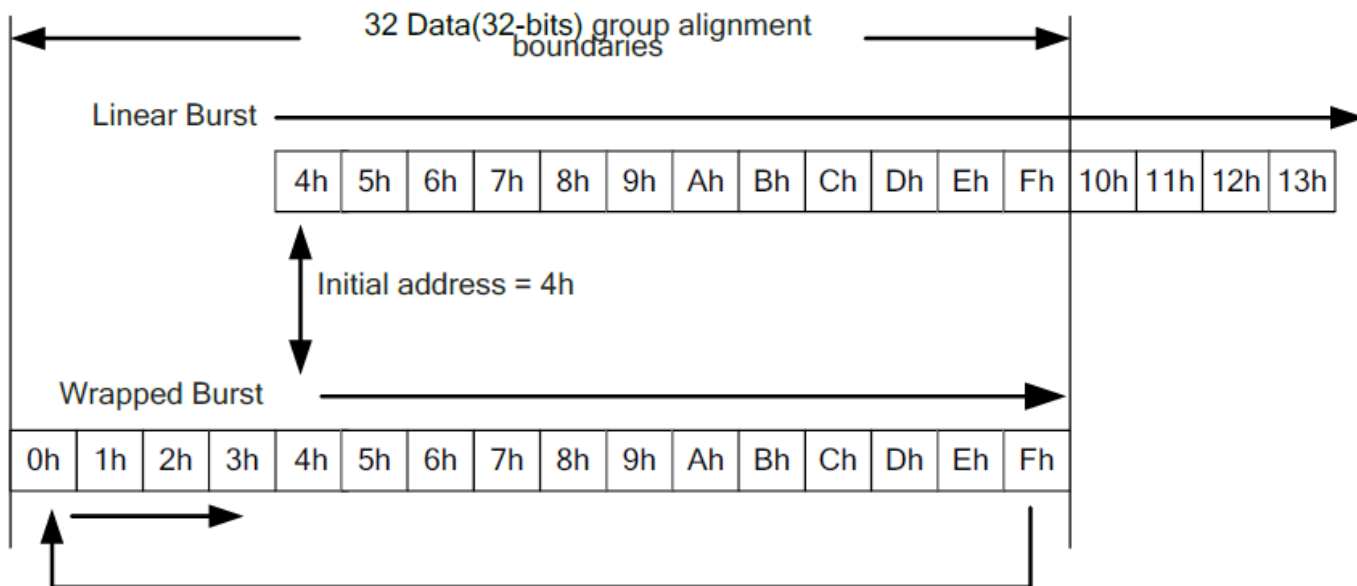

During wrapped transactions, accesses start at a selected location and continue to the end of a configured word group aligned boundary, then wrap to the beginning location in the group, then continue back to the starting location. Wrapped bursts are generally used for critical word first cache line fill read transactions.


During linear transactions, accesses start at a selected location and continue in a sequential manner until the transaction is terminated when CS# returns High.

Linear transactions are generally used for large contiguous data transfers such as graphic images. Since each transaction command selects the type of burst sequence for that transaction, wrapped and linear bursts transactions can be dynamically intermixed as needed.

2. HyperRAM Product Overview

The 512Mbit HyperRAM device is a 1.8V or 3.0V core and I/O, synchronous self-refresh Dynamic RAM (DRAM). The HyperRAM device provides a HyperBus extended-IO slave interface to the host system. HyperBus extended-IO has an 16-bit wide DDR data bus and uses only 32-bit double word address boundaries. Read data transactions provide 32 bits of data during each clock cycle (16 bits on both clock edges). Write data transactions take 32 bits of data from each clock cycle (16 bits on each clock edge).

Figure 2.1 HyperRAM Interface ⁽¹⁾

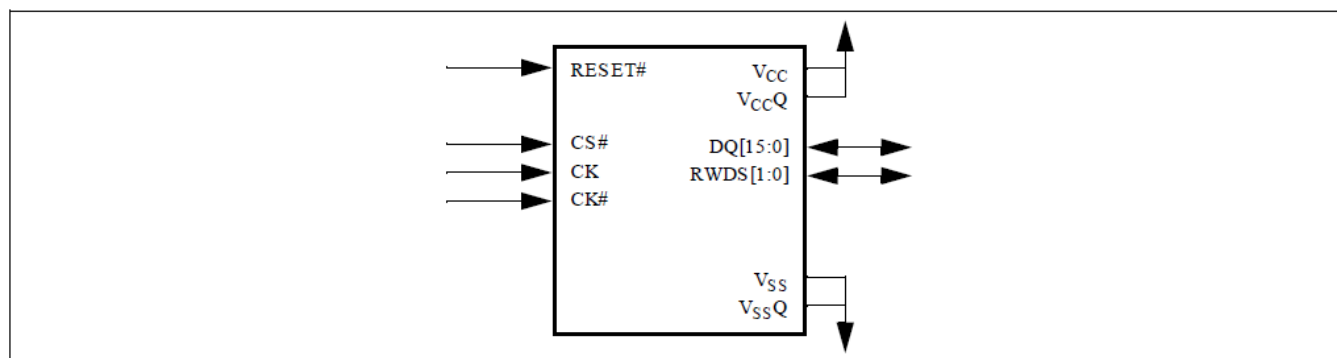

Note

1. CK# is used in Differential Clock mode, but optional.

2.1 HyperBus extended-IO interface

Read and write transactions require two clock cycles to define the target row address and burst type, then an initial access latency of t_{ACC} . During the Command-Address (CA) part of a transaction, the memory will indicate whether an additional latency for a required refresh time (t_{RFH}) is added to the initial latency; by driving the RWDS signal to the High state. During the CA period the third clock cycle will specify the target word address within the target row. During a read (or write) transaction, after the initial data value has been output (or input), additional data can be read from (or written to) the row on subsequent clock cycles in either a wrapped or linear sequence. When configured in Linear Burst mode, the device will automatically fetch the next sequential row from the memory array to support a continuous linear burst. Simultaneously accessing the next row in the array while the read or write data transfer is in progress, allows for a linear sequential burst operation that can provide a sustained data rate of 1000 MB/s (1 word of 16-bit data bus) * 2 (data clock edges) * 250 MHz = 1000 MB/s).

3. HyperRAM Signal Descriptions

3.1 Input/Output Summary

HyperRAM signals are shown in [Table 3.1](#). Active Low signal names have a hash symbol (#) suffix.

Table 3.1 I/O Summary

Symbol	Type	Description
CS#	Input	Chip Select. Bus transactions are initiated with a HIGH to LOW transition. Bus transactions are terminated with a LOW to HIGH transition. The master device has a separate CS# for each slave.
CK, CK# ⁽¹⁾	Input	Differential Clock. Command, address, and data information is output with respect to the crossing of the CK and CK# signals. Use of differential clock is optional. Single Ended Clock. CK# is not used, only a single ended CK is used. The clock is not required to be free-running.
DQ[15:0]	Input/Output	Data Input/Output. DQ[7:0] to transmit Command, Address during command/address (CA) period and lower 16-bit data word during read and write data transactions and Data information is transferred on these signals during Read and Write transactions. DQ[15:8] to transmit upper 16-bit data word during read and write data transactions. Host has to drive DQ[15:8] all to "HIGH" or "LOW" during CA period, and floating is not allowed.
RWDS[1:0]	Input/Output	Read-Write Data Strobe. During the command/address portion of all bus transactions RWDS is a slave output and indicates whether additional initial latency is required. Slave output during read data transfer, data is edge-aligned with RWDS. Slave input during data transfer in write transactions to function as a data mask. RWDS[0] corresponds to the data on DQ[7:0]. RWDS[1] corresponds to the data on DQ[15:8]. (HIGH = Additional latency, LOW = No additional latency)
RESET#	Input, Internal Pull-up	Hardware RESET. When LOW, the slave device will self initialize and return to the STANDBY state. RWDS[1:0] and DQ[15:0] are placed into the HIGH-Z state when RESET# is LOW. The slave RESET# input includes a weak pull-up, if RESET# is left unconnected it will be pulled up to the HIGH state.
VCC	Power Supply	Array Power.
VCCQ	Power Supply	Input/Output Power.
VSS	Power Supply	Array Ground.
VSSQ	Power Supply	Input/Output Ground.
RFU	No Connect	Reserved for Future Use. May or may not be connected internally, the signal/ball location should be left unconnected and unused by PCB routing channel for future compatibility. The signal/ball may be used by a signal in the future.

Note


1. CK# is used in Differential Clock mode, but optional connection. Tie the CK# input pin to either VccQ or VssQ if not connected to the host controller, but do not leave it floating.

3.2 Command/Address Bit Assignments

All HyperRAM bus transactions can be classified as either read or write. A bus transaction is started with CS# going Low with clock in idle state (CK=Low and CK#=High). The first three clock cycles transfer three words of Command/Address (CA0, CA1, CA2) information to define the transaction characteristics. The Command/Address words are presented with DDR timing, using the first six clock edges. The following characteristics are defined by the Command/Address information:

- Read or Write transaction
- Address Space: memory array space or register space
- Register space is used to access Device Identification (ID) registers and Configuration Registers (CR) that identify the device characteristics and determine the slave specific behavior of read and write transfers on the HyperBus interface.
- Whether a transaction will use a linear or wrapped burst sequence.
- The target row (and half-page) address (upper order address).
- The target column (word within half-page) address (lower order address).

Figure 3.1 Command-Address Sequence

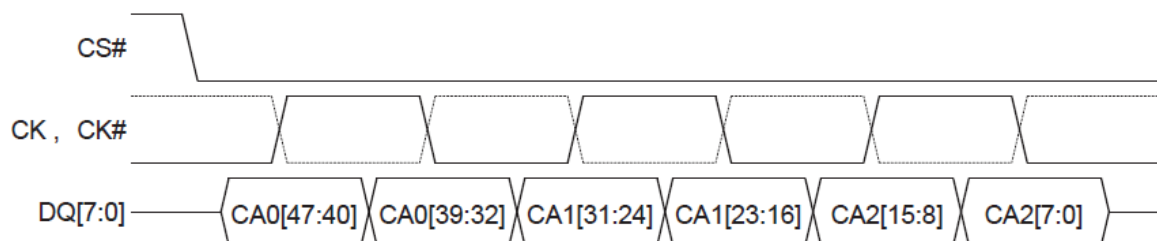

Notes:

1. Figure 3.1 shows the initial three clock cycles of all transactions on the HyperBus extended-IO.
2. CK# of differential clock is shown as dashed line waveform.
3. Command-Address information is "center aligned" with the clock during both Read and Write transactions.
4. Data bits in each byte are always in high to low order with bit 7 on DQ7 and bit 0 on DQ0.
5. DQ[15:8] should be ignored during command/address phase but host has to drive them to "H" or "L".

Table 3.2 Command-Address Bit Assignment to DQ Signals

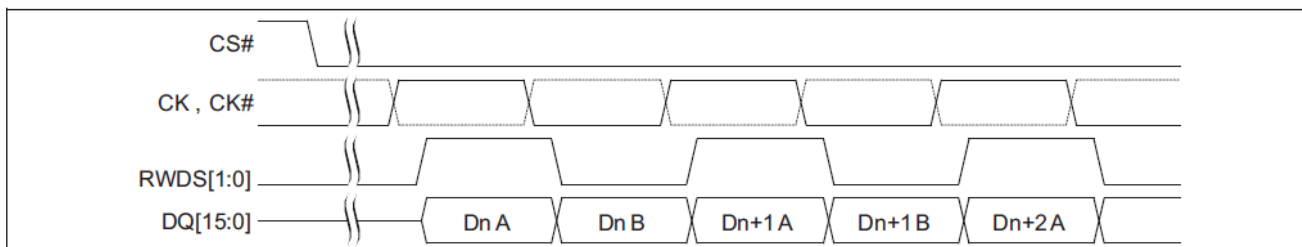
Signal	CA0[47:40]	CA0[39:32]	CA1[31:24]	CA1[23:16]	CA2[15:8]	CA2[7:0]
DQ[7]	CA[47]	CA[39]	CA[31]	CA[23]	CA[15]	CA[7]
DQ[6]	CA[46]	CA[38]	CA[30]	CA[22]	CA[14]	CA[6]
DQ[5]	CA[45]	CA[37]	CA[29]	CA[21]	CA[13]	CA[5]
DQ[4]	CA[44]	CA[36]	CA[28]	CA[20]	CA[12]	CA[4]
DQ[3]	CA[43]	CA[35]	CA[27]	CA[19]	CA[11]	CA[3]
DQ[2]	CA[42]	CA[34]	CA[26]	CA[18]	CA[10]	CA[2]
DQ[1]	CA[41]	CA[33]	CA[25]	CA[17]	CA[9]	CA[1]
DQ[0]	CA[40]	CA[32]	CA[24]	CA[16]	CA[8]	CA[0]

Table 3.3 Command/Address Bit Assignments

CA Bit#	Bit Name	Bit Function
47	R/W#	Identifies the transaction as a read or write. R/W#=1 indicates a Read transaction R/W#=0 indicates a Write transaction
46	Address Space (AS)	Indicates whether the read or write transaction accesses the memory or register space. AS=0 indicates memory space AS=1 indicates the register space The register space is used to access device ID and Configuration registers.
45	Burst Type	Indicates whether the burst will be linear or wrapped. Burst Type=0 indicates wrapped burst Burst Type=1 indicates linear burst
44-16	Row & Upper Column Address	Row & Upper Column component of the target address: System word address bits A31-A3 Any upper Row address bits not used by a particular device density should be set to 0 by the host controller master interface. The size of Rows and therefore the address bit boundary between Row and Column address is slave device dependent.
15-3	Reserved	Reserved for future column address expansion. Reserved bits are don't care in current HyperBus extended-IO devices but should be set to 0 by the host controller master interface for future compatibility.
2-0	Lower Column Address	Lower Column component of the target address: System word address bits A2-0 selecting the starting double word (32-bit) within a half-page.


Notes:

1. A Row is a group of words relevant to the internal memory array structure. The number of Rows may be used in the calculation of a distributed refresh interval for HyperRAM memory.
2. The Column address selects the burst transaction starting word location within a Row. The Column address is split into an upper and lower portion. The upper portion selects an 8-word (32-byte) Half-page and the lower portion selects the 32-bit double word within a Half-page where a read or write transaction burst starts.
3. The initial read access time starts when the Row and Upper Column (Half-page) address bits are captured by a slave interface. Continuous linear read burst is enabled by memory devices internally interleaving access to 32-byte half-pages.
4. HyperBus extended-IO protocol address space limit, assuming: 29 Row & Upper Column address bits
3 Lower Column address bits
Each address selects a double word (32-bit) wide data value

Figure 3.2 Data Placement During a Read Transaction

Notes:

1. Figure 3.2 shows a portion of a Read transaction on the HyperBus extended-IO. CK# of differential clock is shown as dashed line waveform.
2. Data is "edge aligned" with the RWDS serving as a read data strobe during read transactions.
3. Data is always transferred in full double word increments (double word granularity transfers).
4. Double word address increments in each clock cycle. Word A is between RWDS rising and falling edges and is followed by word B between RWDS falling and rising edges, of each double word.
5. Data bits in each 16-bit are always in high to low order with bit 15 on DQ15 and bit 0 on DQ0.

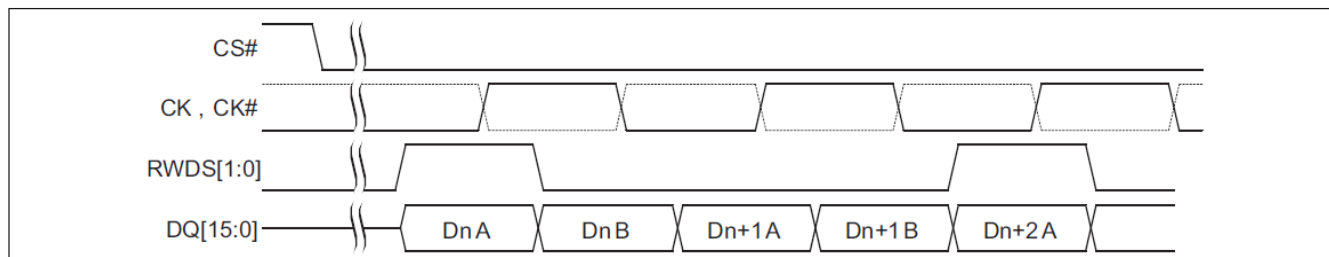Figure 3.3 Data Placement During a Write Transaction



Notes:

1. Figure shows a portion of a Write transaction on the HyperBus extended-IO.
2. Data is "center aligned" with the clock during a Write transaction.
3. RWDS[1:0] functions as a data mask during write data transfers with initial latency.
 - RWDS[0] as a input data mask for the data on DQ0 – 7.
 - RWDS[1] as a input data mask for the data on DQ8 – 15.
4. RWDS is not driven by the master during write data transfers with zero initial latency. Full data words are always written in this case. RWDS may be driven LOW or left High-Z by the slave in this case.

3.3 Read Transactions (Memory array and registers)

The HyperBus extended IO master begins a transaction by driving CS# LOW while clock is idle. Then the clock begins toggling while CA words are transferred.

In CA0, CA[47] = 1 indicates that a Read transaction is to be performed. CA[46] = 0 indicates the memory space is being read or CA[46] = 1 indicates the register space is being read. CA[45] indicates the burst type (wrapped or linear). Read transactions can begin the internal array access as soon as the row and upper column address has been presented in CA0 and CA1 (CA[47:16]). CA2 (CA[15:0]) identifies the target Word address within the chosen row.


The HyperBus extended IO master then continues clocking for a number of cycles defined by the latency count setting in configuration register 0. The initial latency count required for a particular clock frequency is based on RWDS. If RWDS is LOW during CA cycles, one latency count is inserted. If RWDS is HIGH during the CA cycles, an additional latency count is inserted. Once these latency clocks have been completed the memory starts to simultaneously transition the Read-Write Data Strobe (RWDS) and output the target data.

New data is output edge aligned with every transition of RWDS. Data will continue to be output as long as the host continues to transition the clock while CS# is LOW. Note that burst transactions should not be so long as to prevent the memory from doing distributed refreshes.

Wrapped bursts will continue to wrap within the burst length and linear burst will output data in a sequential manner across row boundaries. When a linear burst read reaches the last address in the array, continuing the burst beyond the last address will provide data from the beginning of the address range. Read transfers can be ended at any time by bringing CS# HIGH when the clock is idle.

The clock is not required to be free-running. The clock may remain idle while CS# is HIGH.


Figure 3.4 Read Transaction with additional initial latency

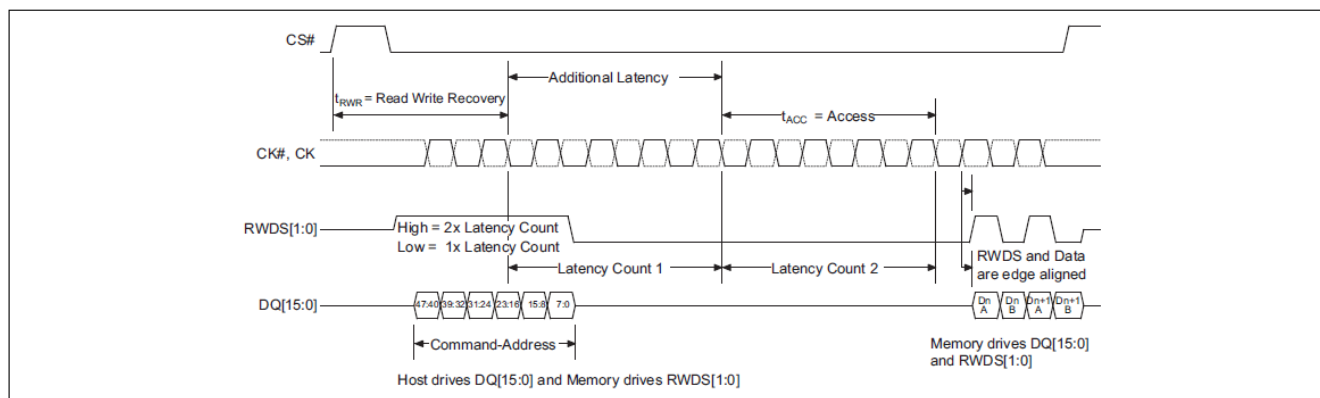

Notes:

1. Transactions are initiated with CS# falling while CK=LOW and CK#=HIGH.
2. CS# must return HIGH before a new transaction is initiated.
3. CK# is the complement of the CK signal. CK# of a differential clock is shown as a dashed line waveform.
4. Read access array starts once CA[23:16] is captured.
5. The read latency is defined by the initial latency value in a configuration register.
6. In this read transaction example, the initial latency count was set to four clocks.
7. In this read transaction a RWDS HIGH indication during CA period delays output of target data by an additional four clocks.
8. The memory device drives RWDS during read transactions.
9. For register read, the output data Dn A[7:0] is RG[15:8], Dn B[7:0] is RG[7:0], Dn+1 A[7:0] is RG[15:8], Dn+1 B[7:0] is RG[7:0].
10. DQ[15:8] is ignored during Command/Address phase but host has to drive them to "H" or "L".

Figure 3.5 Read Transaction without additional initial latency

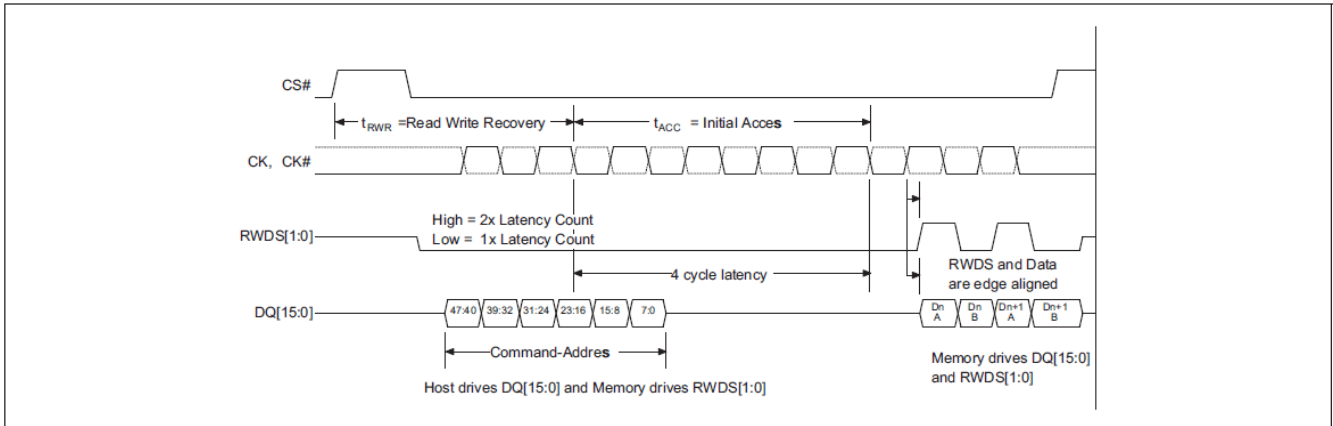

Notes:

1. RWDS is LOW during CA cycles. In this read transaction, there is a single initial latency count for read data access because the read transaction does not begin at a time when additional latency is required by the slave.
2. DQ[15:8] is ignored during Command/Address phase but host has to drive them to "H" or "L".

3.4 Write Transactions (Memory array write)

The HyperBus extended-IO master begins a transaction by driving CS# LOW while clock is idle. Then the clock begins toggling while Command-Address CA words are transferred.

In CA0, CA[47] = 0 indicates that a Write transaction is to be performed. CA[46] = 0 indicates the memory space is being written. CA[45] indicates the burst type (wrapped or linear). Write transactions can begin the internal array access as soon as the row and upper column address has been presented in CA0 and CA1 (CA[47:16]). CA2 (CA[15:0]) identifies the target word address within the chosen row.

The HyperBus extended-IO master then continues clocking for a number of cycles defined by the latency count setting in configuration register 0. The initial latency count required for a particular clock frequency is based on RWDS. If RWDS is LOW during the CA cycles, one latency count is inserted. If RWDS is HIGH during the CA cycles, an additional latency count is inserted.

Once these latency clocks have been completed the HyperBus extended-IO master starts to output the target data. Write data is center aligned with the clock edges. The first 16-bit data is captured by the memory on the rising edge of CK and the second 16-bit data is captured on the falling edge of CK.

During the CA clock cycles, RWDS is driven by the memory.


During the write data transfers, RWDS is driven by the host master interface as a data mask. When data is being written and RWDS is HIGH the 16-bit data will be masked and the array will not be altered. When data is being written and RWDS is LOW the data will be placed into the array. Because the master is driving RWDS during write data transfers, neither the master nor the HyperRAM device are able to indicate a need for latency within the data transfer portion of a write transaction. The acceptable write data burst length setting is also shown in configuration register 0.

Data will continue to be transferred as long as the HyperBus extended-IO master continues to transition the clock while CS# is LOW. Note that burst transactions should not be so long as to prevent the memory from distributed refreshes. Legacy format wrapped bursts will continue to wrap within the burst length. Hybrid wrap will wrap once then switch to linear burst starting at the next wrap boundary. Linear burst accepts data in a sequential manner across page boundaries. Write transfers can be ended at any time by bringing CS# High when the clock is idle.

When a linear burst write reaches the last address in the memory array space, continuing the burst will write to the beginning of the address range.

The clock is not required to be free-running. The clock may remain idle while CS# is HIGH.


Figure 3.5 Write Transaction with additional initial latency

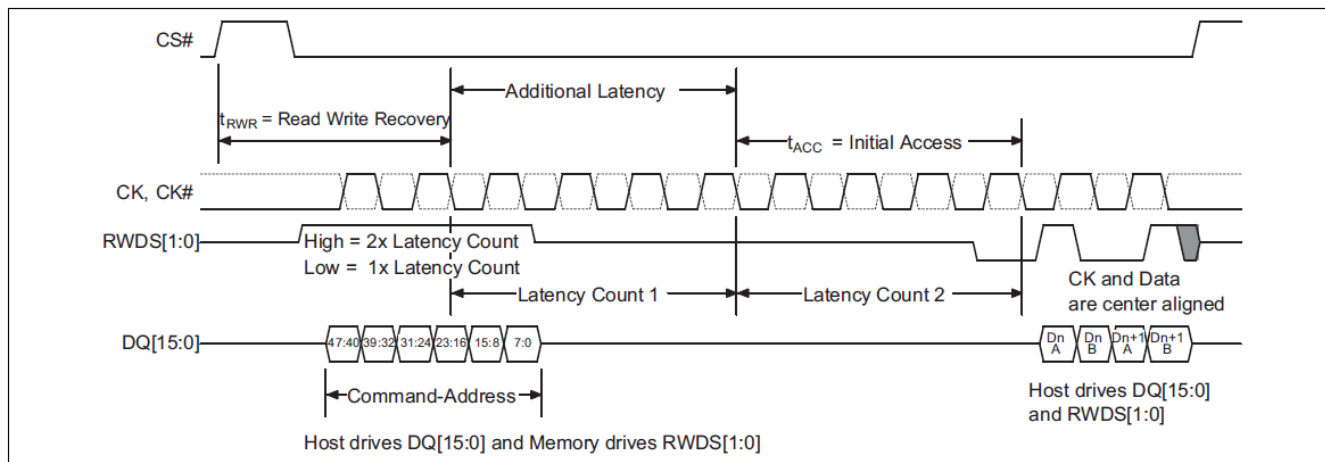

Notes:

1. Transactions must be initiated with CK=LOW and CK#=HIGH.
2. CS# must return HIGH before a new transaction is initiated.
3. During CA, RWDS is driven by the memory and indicates whether additional latency cycles are required.
4. In this example, RWDS indicates that additional initial latency cycles are required.

Figure 3.5 Write Transaction without additional initial latency

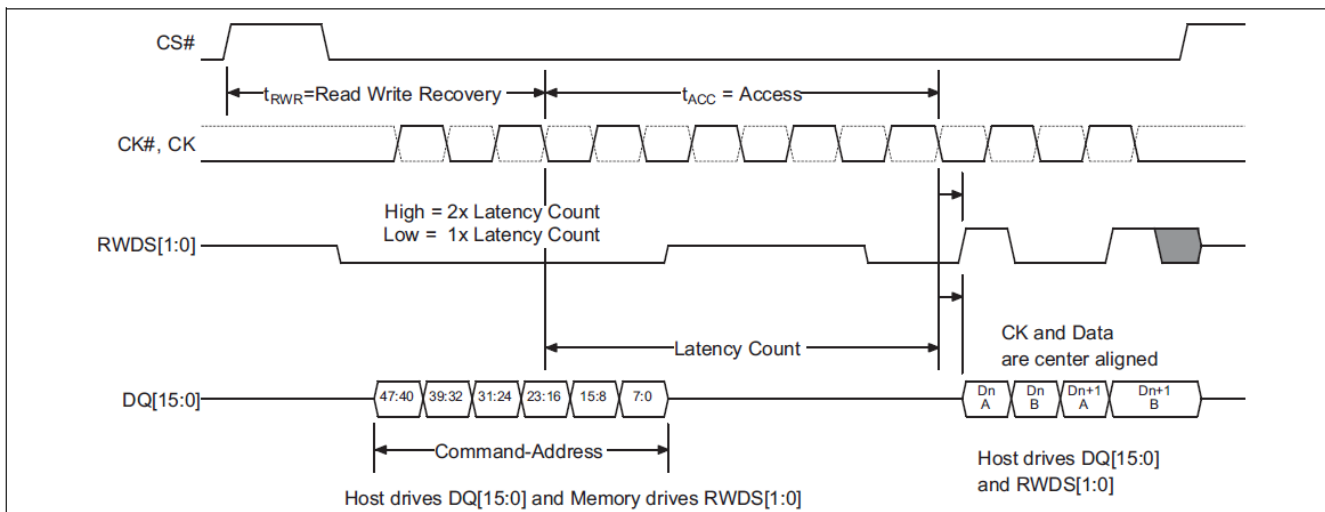

Notes:

1. At the end of CA cycles the memory stops driving RWDS to allow the host HyperBus extended-IO master to begin driving RWDS. The master must drive RWDS to
2. a valid LOW before the end of the initial latency to provide a data mask preamble period to the slave.
3. During data transfer, RWDS is driven by the host to indicate which 16-bit data should be either masked or loaded into the array.
4. The figure shows RWDS masking 16-bit word Dn A and 16-bit Dn+1 B.
5. DQ[15:8] is ignored during Command/Address phase but host has to drive them to "H" or "L".


3.5 Write Transactions without Initial Latency (Register Write)

Write transaction starts with the first three clock cycles providing the Command/Address information indicating the transaction characteristics. CA0 may indicate that a Write transaction is to be performed and also indicates the address space and burst type (wrapped or linear).

Writes without initial latency are used for register space writes. HyperRAM device write transactions with zero latency mean that the CA cycles are followed by write data transfers. Writes with zero initial latency, do not have a turn around period for RWDS. The HyperRAM device will always drive RWDS during the Command-Address period to indicate whether extended latency is required for a transaction that has initial latency. However, the RWDS is driven before the HyperRAM device has received the first byte of CA i.e. before the HyperRAM device knows whether the transaction is a read or write to register space. In the case of a write with zero latency, the RWDS state during the CA period does not affect the initial latency of zero. Since master write data immediately follows the Command-Address period in this case, the HyperRAM device may continue to drive RWDS LOW or may take RWDS to High-Z during write data transfer. The master must not drive RWDS during Writes with zero latency. Writes with zero latency do not use RWDS as a data mask function.

The first 16-bit data is presented on the rising edge of CK and the second 16-bit data is presented on the falling edge of CK. DQ[7:0] transmits RG[15:8] on the rising edge of the CK while DQ[15:8] transmits RG[7:0] on the falling edge of the CK. DQ[15:8] should be ignored during CA cycles but host has to drive them to either “H” or “L”. Write data is center aligned with the clock inputs. Write transfers can be ended at any time by bringing CS# HIGH when clock is idle. The clock is not required to be free-running.

Figure 3.6 Register Write Operation without Initial Latency

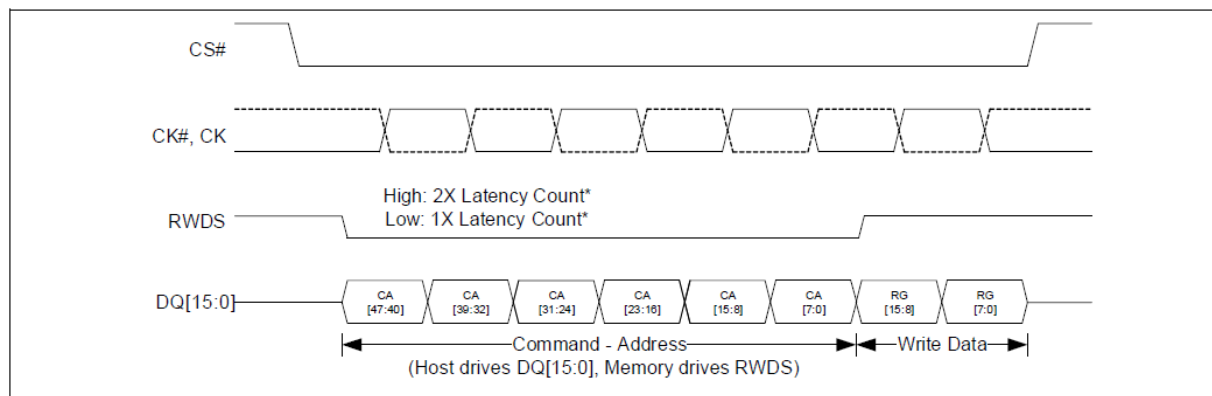

Notes:

1. Latency is not applicable during the Register Write. The RWDS driven LOW or HIGH after the CS# LOW should be ignored by the host. The register write data byte immediately follows the last CA byte (zero clock latency)
2. RWDS is not driven by the host during register write. The HYPERRAM ignores the RWDS status and always writes full data. RWDS may be driven LOW or left High-Z by the slave during write data transfer.

4. Memory Space

When CA[46] is 0 a read or write transaction accesses the DRAM memory array.

Table 4.1 Memory Space Address Map (double word based – 32 bits)

Unit Type	Count	System Word Address Bits	CA Bits	Notes
Rows within 512Mb device	65,536 (rows)	A23-A8	36-21	-
Row	32* Half pages	A7-A3	20-16	Each row has 32 Half-pages. Each Half-page has eight 32-bit double words. Therefore, each row has 256 double words (32-bit) or 1KB.
Half-page	8 * 32-bit double words	A2-A0	2-0	Half-page (HP) address is also referenced as upper column address. A word within a Half-page address is also referred to as lower column address.

5. Register Space

5.1 HYPERBUS extended-IO interface

When CA[46] is 1 a read or write transaction accesses the Register Space.

Table 5.1 Register Space Address Map

Register	System Address	—	—	—	31-27	21-19	18-11	10-3	—	2-0
	CA Bits	47	46	45 ⁽¹⁾	44-40	39-32	31-24	23-16	15-8	7-0
Identification register 0 Read ⁽²⁾		C0h or E0h				00h	00h	000h	00h	00h
Identification register 1 Read ⁽²⁾		C0h or E0h				00h	00h	000h	00h	01h
Configuration register 0 Read		C0h or E0h				00h	01h	000h	00h	00h
Configuration register 0 Write		60h				00h	01h	000h	00h	00h
Configuration register 1 Read		C0h or E0h				00h	01h	000h	00h	01h
Configuration register 1 Write		60h				00h	01h	000h	00h	01h

Notes:

1. CA45 may be either 0 or 1 for either wrapped or linear read. CA45 must be 1 as only linear single word register writes are supported.
2. The burst type (wrapped/linear) definition is not supported in register reads. Hence C0h/E0h have the same effect.

5.2 Register Space Access

Register default values are loaded upon power-up or hardware reset. The registers can be altered at any time while the device is in the standby state.

Loading a register is accomplished with write transaction without initial latency using a single 16-bit word write transaction.

Each register is written with a separate single word write transaction. Register write transactions have zero latency, the single word of data immediately follows the CA. RWDS is not driven by the host during the write because RWDS is always driven by the memory during the CA cycles to indicate whether a memory array refresh is in progress. Because a register space write goes directly to a register, rather than the memory array, there is no initial write latency, related to an array refresh that may be in progress. In a register write, RWDS is also not used as a data mask because both bytes of a register are always written and never masked.

Reserved register fields must be written with their default value. Writing reserved fields with other than default values may produce undefined results.

Notes

- *The host must not drive RWDS during a write to register space.*
- *The RWDS signal is driven by the memory during the Command-Address period based on whether the memory array is being refreshed. This refresh indication does not affect the writing of register data.*
- *The RWDS signal returns to high impedance after the Command-Address period. Register data is never masked. Both data bytes of the register data are loaded into the selected register.*

Reading of a register is accomplished with read transaction with a single or double initial latency using a single 16 bit read transaction. If more than one word is read, the same register value is repeated in each word. The contents of the register is returned in the same manner as reading the memory array data with one or two latency counts, based on the state of RWDS during the Command-Address period. The latency count is defined in the Configuration Register 0 Read Latency field (CR0[7:4]).

5.3 Device Identification Registers

There are two read only, non-volatile, word registers, that provide information on the device selected when CS# is LOW. The device information fields identify:

- Manufacturer
- Type
- Density
 - Row address bit count
 - Column address bit count

Table 5.2 ID Register 0 Bit Assignments

Bits	Function	Settings (Binary)
15-14	Reserved	00 - default
13	Reserved	0 - default
12-8	Row Address Bit Count	01111 - Sixteen Row address bits (512Mb)
7-4	Column Address Bit Count	0111b - Eight column address bits
3-0	Manufacturer	0000 – Reserved 0011 - ISSI 0010 to 1111 - Reserved

Table 5.3 ID Register 1 Bit Assignments

Bits	Function	Settings (Binary)
15-4	Reserved	0000_0000_0000b (default)
3-0	Device Type	1001 – HyperRAM extended-IO

5.3.1 Density and Row Boundaries

The DRAM array size (density) of the device can be determined from the total number of system address bits used for the row and column addresses as indicated by the Row Address Bit Count and Column Address Bit Count fields in the ID0 register. For example: a 512-Mbit HyperRAM device has 8 column address bits and 16 row address bits for a total of 24 **double word** address bits = $2^{24} = 16\text{M} \times 32\text{-bit}$ or 512Mb. The 8 column address bits indicate that each row holds $2^8 \times 32\text{-bit}$ or 8192 bits. The row address bit count indicates there are 65,536 rows to be refreshed within each array refresh interval. The row count is used in calculating the refresh interval.

5.4 Configuration Register 0

Configuration Register 0 (CR0) is used to define the power state and access protocol operating conditions for the HyperRAM device. Configurable characteristics include:

- Wrapped Burst Length (16, 32, 64, or 128 16-bit word aligned and length data group)
- Wrapped Burst Type
 - Legacy wrap (Sequential access with wrap around within a selected length and aligned group).
 - Hybrid wrap (Legacy wrap once then linear burst at start of the next sequential group).
- Initial Latency
- Variable Latency
 - Whether an array read or write transaction will use fixed or variable latency. If fixed latency is selected the memory will always indicate a refresh latency and delay the read data transfer accordingly. If variable latency is selected, latency for a refresh is only added when a refresh is required at the same time a new transaction is starting.
- Output Drive Strength
- Deep Power Down (DPD) mode

Table 5.4 Configuration Register Bit Assignments

CR0 Bit	Function	Settings (Binary)
[15]	Deep Power Down Enable	1 – Normal operation (default). HYPERRAM will automatically set the value to “1” after DPD exit. 0 – Writing 0 causes the device to enter Deep Power Down.
[14:12]	Drive Strength	000- 34 ohms (default) 001- 115 ohms 010- 67 ohms 011- 46 ohms 100- 34 ohms 101- 27 ohms 110- 22 ohms 111- 19 ohms
[11:8]	Reserved	1 - Reserved (default) Reserved for Future Use. When writing this register, these bits should be set to 1 for future compatibility.
[7:4]	Initial Latency	0000 - 5 Clock Latency @ 133MHz Max Frequency 0001 - 6 Clock Latency @ 166MHz Max Frequency 0010 - 7 Clock Latency @ 250MHz-1.8V, 200MHz-3.0V Max Frequency (default) 0011 - 8 Clock Latency @ 250MHz-1.8V, 200MHz-3.0V Max Frequency 0100 – Reserved ... 1101 - Reserved 1110 - 3 Clock Latency@ 85MHz Max Frequency 1111 - 4 Clock Latency @ 104MHz Max Frequency
[3]	Fixed Latency Enable	0 – Variable latency – 1 or 2 times initial latency depending on RWDS during CA cycles. 1 - Fixed 2 times Initial Latency (default)
[2]	Hybrid Burst Enable	0 - Wrapped burst sequence to follow hybrid burst sequencing 1 - Wrapped burst sequence in legacy wrapped burst manner (default) This bit setting is effective only when the “Burst Type” bit in the Command/Address register is set to ‘0’. CA[45] = 0; otherwise, it is ignored.
[1:0]	Burst Length	00 - 128 words 01 - 64 words 10 - 16 words 11 - 32 words (default)

5.4.1 Wrapped Burst

A wrapped burst transaction accesses memory within a group of words aligned on a word boundary matching the length of the configured group. Wrapped access groups can be configured as 16, 32, 64, or 128 16-bit data alignment and length. During wrapped transactions, access starts at the Command-Address selected location within the group, continues to the end of the configured word group aligned boundary, then wraps around to the beginning location in the group, then continues back to the starting location. Wrapped bursts are generally used for critical 16-bit first instruction or data cache line fill read accesses.

5.4.2 Hybrid Burst

The beginning of a hybrid burst will wrap within the target address wrapped burst group length before continuing to the next half-page of data beyond the end of the wrap group. Continued access is in linear burst order until the transfer is ended by returning CS# HIGH. This hybrid of a wrapped burst followed by a linear burst starting at the beginning of the next burst group, allows multiple sequential address cache lines to be filled in a single access. The first cache line is filled starting at the critical word. Then the next sequential line in memory can be read in to the cache while the first line is being processed.

Table 5.5 CR0[2] Control of Wrapped Burst Sequence

Bit	Default Value	Name
2	1	Hybrid Burst Enable CR[2]= 0: Wrapped burst sequences to follow hybrid burst sequencing CR[2]= 1: Wrapped burst sequences in legacy wrapped burst manner

Table 5.6 Example Wrapped Burst Sequences (HyperBUS extended-IO Addressing)

Burst Selection		Burst Type	Wrap Boundary (16-bit)	Start Address (Hex)	Address Sequence (Hex) (32-bit data)
CA[45]	CR0[2:0]				
0	000	Hybrid 128	128 Wrap once then Linear	XXXXXX03	03, 04, 05, 06, 07, 08, 09, 0A, 0B, 0C, 0D, 0E, 0F, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 1A, 1B, 1C, 1D, 1E, 1F, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 2A, 2B, 2C, 2D, 2E, 2F, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 3A, 3B, 3C, 3D, 3E, 3F, 00, 01, 02 (wrap complete, now linear beyond the end of the initial 128 word wrap group) 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 4A, 4B, 4C, 4D, 4E, 4F, 50, 51, ...
0	001	Hybrid 64	64 Wrap once then Linear	XXXXXX03	03, 04, 05, 06, 07, 08, 09, 0A, 0B, 0C, 0D, 0E, 0F, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 1A, 1B, 1C, 1D, 1E, 1F, 00, 01, 02 (wrap complete, now linear beyond the end of the initial 64 word wrap group) 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 2A, 2B, 2C, 2D, 2E, 2F, 30, 31, ...
				XXXXXX2E	2E, 2F, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 3A, 3B, 3C, 3D, 3E, 3F, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 2A, 2B, 2C, 2D, (wrap complete, now linear beyond the end of the initial 64 word wrap group) 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 4A, 4B, 4C, 4D, 4E, 4F, 50, 51, ...
0	010	Hybrid 16	16 Wrap once then Linear	XXXXXX02	02, 03, 04, 05, 06, 07, 00, 01, (wrap complete, now linear beyond the end of the initial 16 word wrap group) 08, 09, 0A, 0B, 0C, 0D, 0E, 0F, 10, 11, 12, ...
				XXXXXX0C	0C, 0D, 0E, 0F, 08, 09, 0A, 0B, (wrap complete, now linear beyond the end of the initial 16 word wrap group) 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 1A, ...
0	011	Hybrid 32	32 Wrap once then Linear	XXXXXX0A	0A, 0B, 0C, 0D, 0E, 0F, 00, 01, 02, 03, 04, 05, 06, 07, 08, 09, ... (wrap complete, now linear beyond the end of the initial 32 word wrap group)
0	100	Wrap 128	128	XXXXXX03	03, 04, 05, 06, 07, 08, 09, 0A, 0B, 0C, 0D, 0E, 0F, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 1A, 1B, 1C, 1D, 1E, 1F, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 2A, 2B, 2C, 2D, 2E, 2F, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 3A, 3B, 3C, 3D, 3E, 3F, 00, 01, 02, ...
0	101	Wrap 64	64	XXXXXX03	03, 04, 05, 06, 07, 08, 09, 0A, 0B, 0C, 0D, 0E, 0F, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 1A, 1B, 1C, 1D, 1E, 1F, 00, 01, 02, ...
				XXXXXX2E	2E, 2F, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 3A, 3B, 3C, 3D, 3E, 3F, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 2A, 2B, 2C, 2D, ...
0	110	Wrap 16	16	XXXXXX02	02, 03, 04, 05, 06, 07, 00, 01, ...
				XXXXXX0C	0C, 0D, 0E, 0F, 08, 09, 0A, 0B, ...
0	111	Wrap 32	32	XXXXXX0A	0A, 0B, 0C, 0D, 0E, 0F, 00, 01, 02, 03, 04, 05, 06, 07, 08, 09, ...
				XXXXXX1E	1E, 1F, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 1A, 1B, 1C, 1D, ...
1	XXX	Linear	Linear Burst	XXXXXX03	03, 04, 05, 06, 07, 08, 09, 0A, 0B, 0C, 0D, 0E, 0F, 10, 11, 12, 13, 14, 15, 16, 17, 18, ...

5.4.3 Initial Latency

Memory Space read and write transactions or Register Space read transactions require some initial latency to open the row selected by the Command-Address. This initial latency is t_{ACC} . The number of latency clocks needed to satisfy t_{ACC} depends on the HyperBus extended-IO frequency and can vary from 3 to 8 clocks. The value in CR0[7:4] selects the number of clocks for initial latency. **The default value is 7 clocks, allowing for operation up to a maximum frequency of 250MHz (1.8V)/200MHz(3.0V)** prior to the host system setting a lower initial latency value that may be more optimal for the system.

In the event a distributed refresh is required at the time a Memory Space read or write transaction or Register Space read transaction begins, the RWDS signal goes HIGH during the Command-Address to indicate that an additional initial latency is being inserted to allow a refresh operation to complete before opening the selected row.

Register Space write transactions always have zero initial latency. RWDS may be HIGH or LOW during the Command-Address period. The level of RWDS during the Command-Address period does not affect the placement of register data immediately after the Command-Address, as there is no initial latency needed to capture the register data. A refresh operation may be performed in the memory array in parallel with the capture of register data.

5.4.4 Fixed Latency

A configuration register option bit CR0[3] is provided to make all Memory Space read and write transactions or Register Space read transactions require the same initial latency by always driving RWDS HIGH during the Command-Address to indicate that two initial latency periods are required. This fixed initial latency is independent of any need for a distributed refresh, it simply provides a fixed (deterministic) initial latency for all of these transaction types. The fixed latency option may simplify the design of some HyperBus extended-IO memory controllers or ensure deterministic transaction performance. Fixed latency is the default POR or reset configuration. The system may clear this configuration bit to disable fixed latency and allow variable initial latency with RWDS driven HIGH only when additional latency for a refresh is required.

5.4.5 Driver Strength

DQ and RWDS signal line loading, length, and impedance vary depending on each system design. Configuration register bits CR0[14:12] provide a means to adjust the DQ[15:0] and RWDS[1:0] signal output impedance to customize the DQ and RWDS signal impedance to the system conditions to minimize high speed signal behaviors such as overshoot, undershoot, and ringing. The default POR or reset configuration value is 000b to select the mid point of the available output impedance options.

The impedance values shown are typical for both pull-up and pull-down drivers at typical silicon process conditions, nominal operating voltage (1.8V or 3V) and 50°C. The impedance values may vary from the typical values depending on the Process, Voltage, and Temperature (PVT) conditions. Impedance will increase with slower process, lower voltage, or higher temperature. Impedance will decrease with faster process, higher voltage, or lower temperature.

Each system design should evaluate the data signal integrity across the operating voltage and temperature ranges to select the best drive strength settings for the operating conditions.

5.4.6 Deep Power Down

When the HYPERRAM device is not needed for system operation, it may be placed in a very low power consuming state called deep power down (DPD), by writing '0' to CR0[15].

When CR0 [15] is cleared to '0', the device enters the DPD state within tDPDIN time and all refresh operations stop. The data in the device is lost, (becomes invalid without refresh) during DPD state.

Exiting DPD requires driving CS# LOW then HIGH, POR, or a reset. Only CS# and RESET# signals are monitored during DPD mode.

5.5 Configuration Register 1

Configuration Register 1 (CR1) is used to define the refresh array size, refresh rate and hybrid sleep for the HYPERRAM device. Configurable characteristics include:

- Master clock type
- Hybrid sleep state
- Partial array refresh
- Refresh rate

Table 5.7 Configuration Register Bit Assignments

CR1 Bit	Function	Setting (Binary)
[15:7]	Reserved	11111111 - Reserved (default) When writing this register, these bits should keep 11111111 for future compatibility.
[6]	Master clock type	1 – Single-ended - CK (default) 0 – Differential - CK, CK#
[5]	Hybrid Sleep	1 – Causes the device to enter hybrid sleep mode 0 – Normal operation (default)
[4:2]	Partial array refresh	000 – Full array (default) 001 – Bottom 1/2 array 010 – Bottom 1/4 array 011 – Bottom 1/8 array 100 – None 101 – Top 1/2 array 110 – Top 1/4 array 111 – Top 1/8 array
[1:0]	Distributed Refresh Interval (Read Only)	10 – 1 μ s tCSM for A2 Grade 11 – Reserved 00 – Reserved 01 – 4 μ s tCSM for Industrial temperature range device

5.5.1 Master clock type

Two clock type, namely single ended and differential, are supported. CR1[6] selects which type to use.

- In the single ended clock mode (by default), CK# input is not enabled; hence it may be left either floating or biased to HIGH or LOW.
- In the differential clock mode (when enabled), the CK# input can't be left floating. It must be either driven by the host, or biased to HIGH or LOW.

5.5.2 Partial array refresh

The partial array refresh configuration restricts the refresh operation in HyperRAM to a portion of the mamory array specified bt CR1[4:2]. This reduces the standby current. The default configuration refreshes the whole array.

5.5.3 Hybrid sleep (HS)

When the HYPERRAM is not needed for system operation but data in the device needs to be retained, it may be placed in hybrid sleep state to save more power. Enter hybrid sleep state by writing 1 to CR1[5]. Bringing CS# LOW will cause the device to exit HS state and reset CR1[5] to '0'. Also, POR or a hardware reset will cause the device to exit hybrid state. Note that POR or a hardware reset disables refresh where the memory core data can potentially get lost.

5.5.4 Distributed Refresh Interval

The HYPERRAM device is built with volatile DRAM array requires periodic refresh of all bits in it. The refresh operation can be done by an internal self-refresh logic that will evenly refresh the memory array automatically.

The automatic refresh operation can only be done when the memory array is not actively read or written by the host system. The refresh logic waits for the end of any active read or write before doing a refresh, if a refresh is needed at that time. If a new read or write begins before the refresh is completed, the memory will drive RWDS HIGH during the CA period to indicate that an additional initial latency time is required at the start of the new access in order to allow the refresh operation to complete before starting the new access. The evenly distributed refresh operations require a maximum refresh interval between two adjacent refresh operations. The maximum distributed refresh interval varies with temperature.

Table 5.8 Array refresh interval per temperature

Device Temperature (°C)	CR1 Setting [1:0]	Refresh Interval t _{CSM}
I Grade (-40°C ~ +85°C)	01b	4 us
Auto A2 Grade (-40°C ~ +105°C)	10b	1 us

The distributed refresh operation requires that the host does not do burst transactions longer than the distributed refreshes interval to prevent the memory from unable doing the distributed refresh operation when it is needed. This sets an upper limit on the length of read and write transactions so that the automatic distributed refresh can be done between transactions.

This limit is called the CS# LOW maximum time (t_{CSM}) and the t_{CSM} will be equal to the maximum distributed refresh interval. The host system is required to respect the t_{CSM} value by terminating each transaction before violating t_{CSM}. This can be done by host memory controller splitting long transactions when reaching the t_{CSM} limit, or by host system hardware or software not performing a single burst read or write transactions that would be longer than t_{CSM}.

The maximum refresh interval is longer at lower temperatures such that t_{CSM} could be increased to allow longer transactions. The host may determine the operating temperature from a temperature sensor in the system and use t_{CSM} value from the table accordingly, or it may determine dynamically by reading the read only CR1[1:0] bits in order to set the distributed refresh interval prior to the HYPERRAM access.

6. Interface States

6.1 Power Conservative Modes

6.1.1 Interface Standby

Standby is the default, low power, state for the interface while the device is not selected by the host for data transfer (CS# = High). All inputs, and outputs other than CS# and RESET# are ignored in this state.

6.1.2 Active Clock Stop


The Active Clock Stop mode reduces device interface energy consumption to the ICC6 level during the data transfer portion of a read or write operation. The device automatically enables this mode when clock remains stable for $t_{ACC} + 30$ ns. While in Active Clock Stop mode, read data is latched and always driven onto the data bus.

Active Clock Stop mode helps reduce current consumption when the host system clock has stopped to pause the data transfer. Even though CS# may be LOW throughout these extended data transfer cycles, the memory device host interface will go into the Active Clock Stop current level at $t_{ACC} + 30$ ns. This allows the device to transition into a lower current mode if the data transfer is stalled.

Active read or write current will resume once the data transfer is restarted with a toggling clock. The Active Clock Stop mode must not be used in violation of the t_{CSM} limit. CS# must go HIGH before t_{CSM} is violated.

Clock can be stopped during any portion of the active transaction as long as it is in the LOW state. Note that it is recommended to avoid stopping the clock during register access

Figure 6.1 Active clock stop during read transaction (DDR)

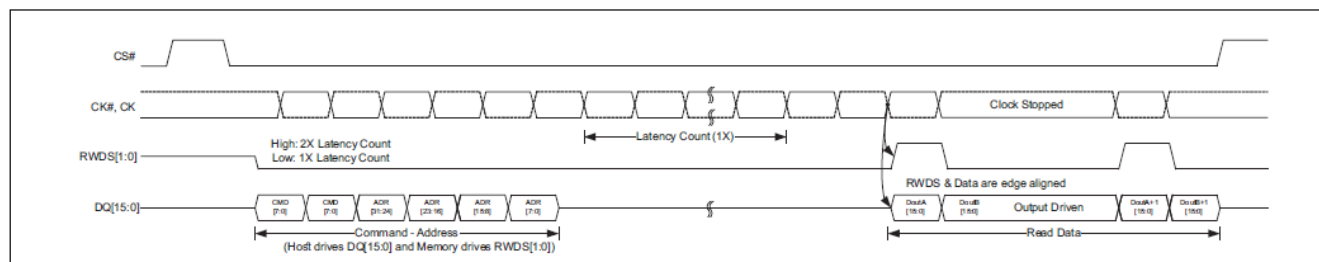


Notes:

1. DQ[15:8] should be ignored during command/address phase but host has to drive them to "H" or "L"
2. RWDS is LOW during CA cycles. In this transaction, there is a single initial latency count for read data access because this read transaction does not begin at a time when additional latency is required by the slave.

6.1.3 Hybrid sleep

In the hybrid sleep (HS) state, the current consumption is reduced (I_{HS}). HS state is entered by writing '1' to CR1[5]. The device reduces power within t_{HSIN} time. The data in memory space and register space is retained during HS state. Bringing CS# LOW will cause the device to exit HS state and reset CR1[5] to '0'. Also, POR or a hardware reset will cause the device to exit hybrid sleep state. Note that a POR or a hardware reset disables refresh where the memory array data can potentially get lost. Returning to STANDBY state requires t_{EXITHS} time. Following the exit from HS due to any of these events, the device is in the same state as entering hybrid state.

Figure 6.2 Enter HS transaction ⁽¹⁾

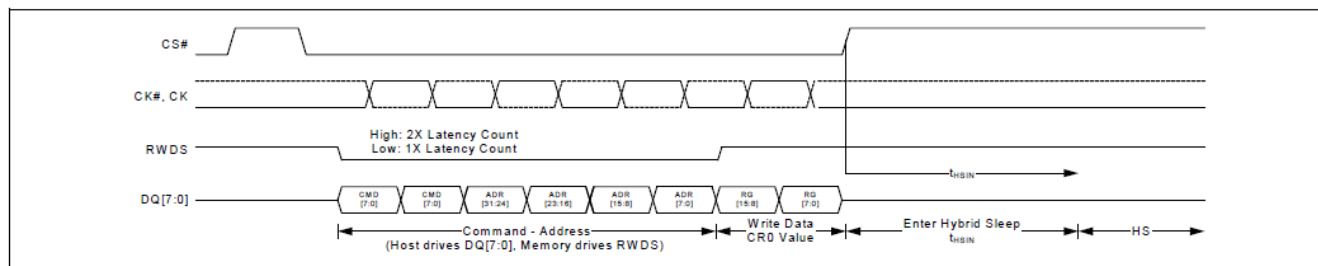

Note:

1. DQ[15:8] should be ignored during command/address phase but host has to drive them to "H" or "L"

Figure 6.3 Exit HS transaction

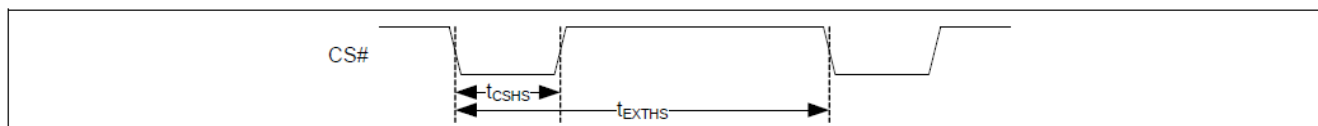



Table 6.1 Hybrid sleep timing parameters

Paramet	Description	Min	Max	Unit
t_{HSIN}	Hybrid sleep CR1[5] = 1 register write to enter HS power level	-	3	us
t_{CSHS}	CS# pulse width to exit HS	60	3000	ns
t_{EXTHS}	CS# exit hybrid sleep to standby wakeup time	-	100	us

6.1.4 Deep power down

In the hybrid sleep (HS) state, the current consumption is driven to the lowest possible level (I_{DPD}). DPD state is entered by writing '0' to CR0[15]. The device reduces power within t_{DPDIN} time and all refresh operations stop. The data in memory space is lost, (becomes invalid without refresh) during DPD state. Driving CS# LOW then HIGH will cause the device to exit DPD state. Also, POR or a hardware reset will cause the device to exit DPD state. Returning to STANDBY state requires t_{EXTDPD} time. Returning to STANDBY state following a POR requires t_{VCS} time, as with any other POR. Following the exit from DPD due to any of these events, the device is in the same states as following POR.

Figure 6.4 Enter DPD transaction ⁽¹⁾

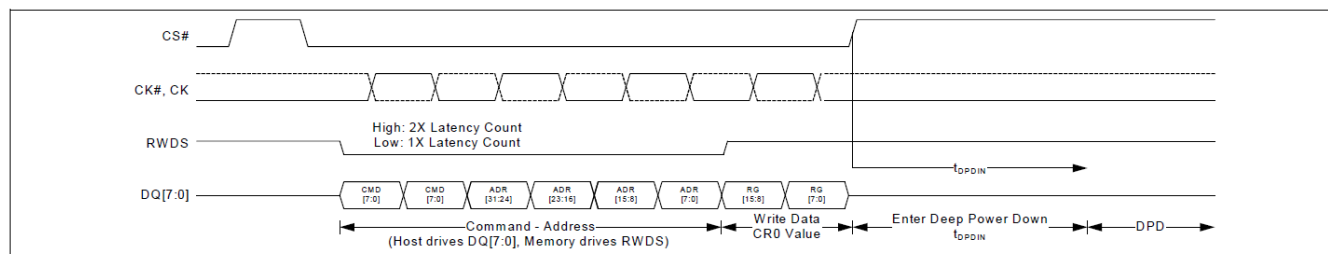

Note:

1. DQ[15:8] should be ignored during command/address phase but host has to drive them to "H" or "L"

Figure 6.5 Exit DPD transaction

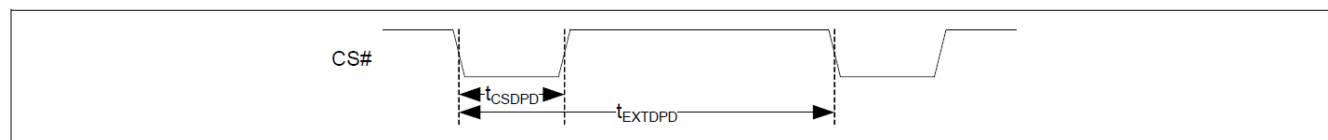


Table 6.2 Deep power down timing parameter

Paramet	Description	Min	Max	Unit
t_{DPDIN}	Deep power down CR0[15] = 0 register write to DPD power level	-	3	us
t_{CSDPD}	CS# pulse width to exit DPD	200	3000	ns
t_{EXTDPD}	CS# exit deep power down to standby wakeup time	-	150	us

7. Interface States

Table 7.1 describes the required value of each signal for each interface state.

Table 7.1 Interface States

Interface State	V_{CC} / V_{CCQ}	CS#	CK, CK#	DQ[7:0]	RWDS	RESET#
Power-Off	$< V_{LKO}$	X	X	HIGH-Z	HIGH-Z	X
Power-On (Cold) Reset	$\geq V_{CC} / V_{CCQ} \text{ min}$	X	X	HIGH-Z	HIGH-Z	X
Hardware (Warm) Reset	$\geq V_{CC} / V_{CCQ} \text{ min}$	X	X	HIGH-Z	HIGH-Z	L
Interface Standby	$\geq V_{CC} / V_{CCQ} \text{ min}$	H	X	HIGH-Z	HIGH-Z	H
CA	$\geq V_{CC} / V_{CCQ} \text{ min}$	L	T	Master Output Valid	Y	H
Read Initial Access Latency (data bus turn around period)	$\geq V_{CC} / V_{CCQ} \text{ min}$	L	T	HIGH-Z	L	H
Write Initial Access Latency (RWDS turn around period)	$\geq V_{CC} / V_{CCQ} \text{ min}$	L	T	HIGH-Z	HIGH-Z	H
Read data transfer	$\geq V_{CC} / V_{CCQ} \text{ min}$	L	T	Slave Output Valid	Slave Output Valid Z or T	H
Write data transfer with Initial Latency	$\geq V_{CC} / V_{CCQ} \text{ min}$	L	T	Master Output Valid	Master Output Valid X or T	H
Write data transfer without Initial Latency ⁽¹⁾	$\geq V_{CC} / V_{CCQ} \text{ min}$	L	T	Master Output Valid	Slave Output L or HIGH-Z	H
Active Clock Stop	$\geq V_{CC} / V_{CCQ} \text{ min}$	L	Idle	Master or Slave Output Valid or HIGH-Z	Y	H
Deep Power Down	$\geq V_{CC} / V_{CCQ} \text{ min}$	L	X or T	HIGH-Z	HIGH-Z	H
Hybrid sleep	$\geq V_{CC} / V_{CCQ} \text{ min}$	H	X or T	HIGH-Z	HIGH-Z	H

Legend

L = V_{IL} , H = V_{IH}

X = either V_{IL} or V_{IH}

Y = either V_{IL} or V_{IH} or V_{OL} or V_{OH}

Z = either V_{OL} or V_{OH}

L/H = rising edge

H/L = falling edge

T = Toggling during information transfer

Idle = CK is LOW and CK# is HIGH.

Valid = all bus signals have stable L or H level

Notes

1. Writes without initial latency (with zero initial latency), do not have a turn around period for RWDS[1:0]. The HyperRAM device will always drive RWDS[1:0] during the CA period to indicate whether extended latency is required.

Since master write data immediately follows the CA period the HyperRAM device may continue to drive RWDS[1:0] LOW or may take RWDS[1:0] to HIGH-Z.

The master must not drive RWDS[1:0] during Writes with zero latency. Writes with zero latency do not use RWDS[1:0] as a data mask function. All write data are written.

8. POWER-UP/POWER-DOWN

The device utilizes an 8-bit command register. Refer to Table 8.1. Command Set for details on commands and command codes. All commands, addresses, and data are shifted in with the most significant bit (MSB) first on Serial Data Input (SI) or Serial Data IOs (IO0, IO1, IO2, IO3). The input data on SI or IOs is latched on the rising edge of Serial Clock (SCK) for normal mode and both of rising and falling edges for DTR mode after Chip Select (CS#) is driven low (V_{IL}). Every command sequence starts with a one-byte command code and is followed by address bytes, data bytes, or both address bytes and data bytes, depending on the type of command. CE# must be driven high (V_{IH}) after the last bit of the command sequence has been shifted in to end the operation.

8.1 Power-Up Initialization

HyperRAM products include an on-chip voltage sensor used to launch the power-up initialization process. V_{CC} and V_{CCQ} must be applied simultaneously. When the power supply reaches a stable level at or above $V_{CC}(\min)$, the device will require t_{VCS} time to complete its self-initialization process.

The device must not be selected during power-up. CS# must follow the voltage applied on V_{CCQ} until $V_{CC}(\min)$ is reached during power-up, and then CS# must remain high for a further delay of t_{VCS} . A simple pull-up resistor from V_{CCQ} to Chip Select (CS#) can be used to insure safe and proper power-up.

If RESET# is Low during power up, the device delays start of the t_{VCS} period until RESET# is High. The t_{VCS} period is used primarily to perform refresh operations on the DRAM array to initialize it.

When initialization is complete, the device is ready for normal operation.

Figure 8.1 Power-up with RESET# HIGH

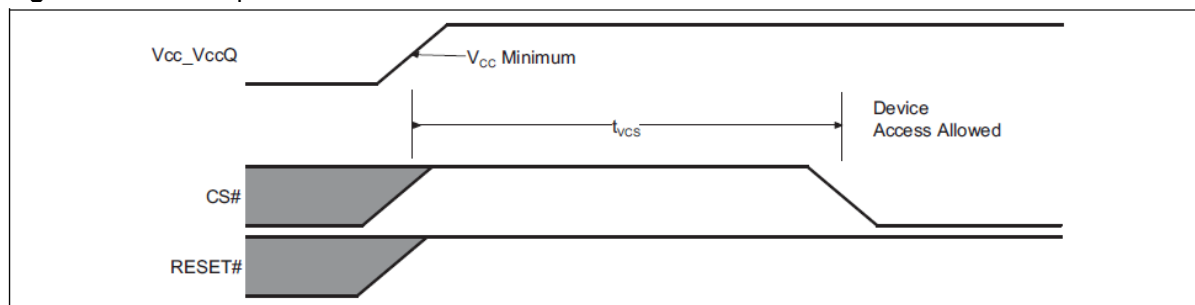


Figure 8.2 Power-up with RESET# LOW

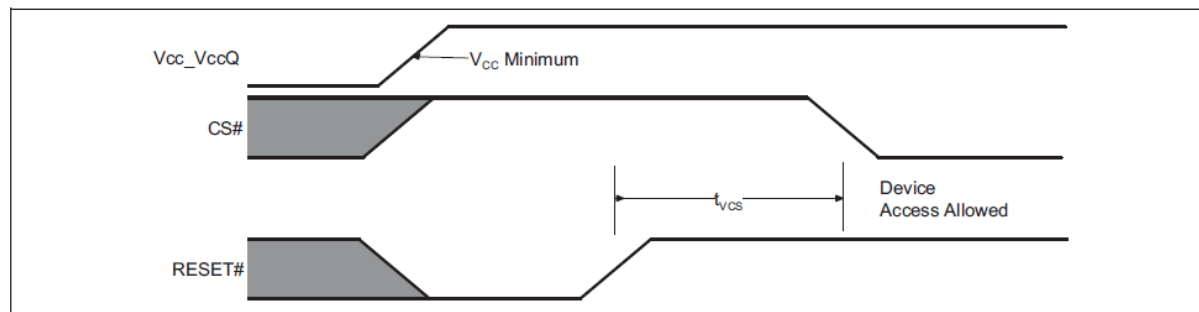


Table 8.1 Power Up and Reset Parameters

Parameter	Description	Min	Max	Unit
V_{CC}	1.8V V_{CC} Power Supply	1.7	1.95	V
V_{CC}	3V V_{CC} Power Supply	2.7	3.6	V
t_{VCS}	V_{CC} and $V_{CCQ} \geq$ minimum and RESET# High to first access	–	150	μs

Notes:

1. Bus transactions (read and write) are not allowed during the power-up reset time (t_{VCS}).
2. V_{CCQ} must be the same voltage as V_{CC} .
3. V_{CC} ramp rate may be non-linear.

8.2 Power-Down


HyperRAM devices are considered to be powered-off when the core power supply (V_{CC}) drops below the V_{CC} Lock-Out voltage (V_{LKO}). During a power supply transition down to the VSS level, V_{CCQ} should remain less than or equal to V_{CC} .

At the V_{LKO} level, the HyperRAM device will have lost configuration or array data.

V_{CC} must always be greater than or equal to V_{CCQ} ($V_{CC} \geq V_{CCQ}$).

During Power-Down or voltage drops below V_{LKO} , the core power supply voltages must also drop below V_{CC} Reset (V_{RST}) for a Power Down period (t_{PD}) for the part to initialize correctly when the power supply again rises to V_{CC} minimum.

If during a voltage drop the V_{CC} stays above V_{LKO} the part will stay initialized and will work correctly when V_{CC} is again above V_{CC} minimum. If V_{CC} does not go below and remain below V_{RST} for greater than t_{PD} , then there is no assurance that the POR process will be performed. In this case, a hardware reset will be required ensure the HyperBus extended-IO device is properly initialized.

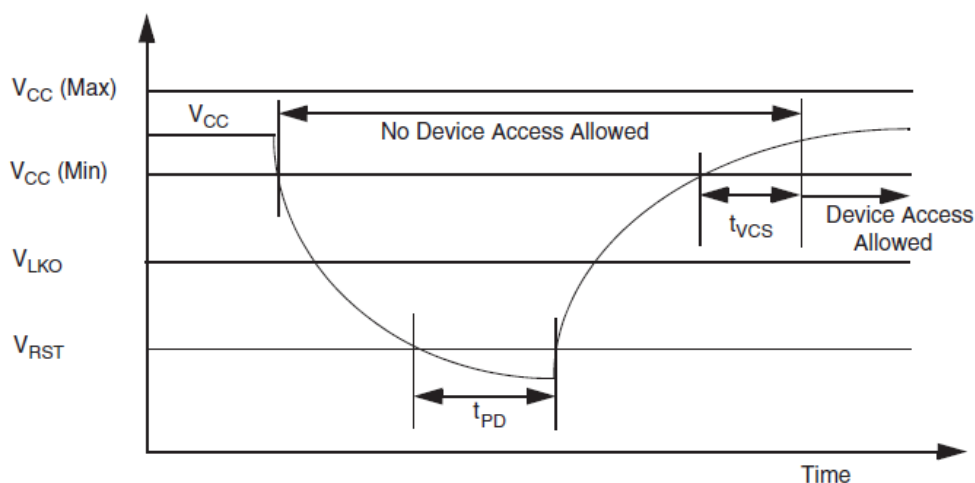Figure 8.3 Power-Down or Voltage Drop


The following section describes HyperRAM device dependent aspects of power down specifications.

Table 8.2 Power Up and Reset Parameters (1.8V)

Symbol	Parameter	Min	Max	Unit
V_{CC}	V_{CC} Power Supply	1.7	1.95	V
V_{LKO}	V_{CC} Lock-out below which re-initialization is required	1.7	–	V
V_{RST}	V_{CC} Low Voltage needed to ensure initialization will occur	0.8	–	V
t_{PD}	Duration of $V_{CC} \leq V_{RST}$	30	–	μs

Note:

1. V_{CC} ramp rate can be non-linear.

Table 8.3 Power Up and Reset Parameters (3.0V)

Symbol	Parameter	Min	Max	Unit
V_{CC}	V_{CC} Power Supply	2.7	3.6	V
V_{LKO}	V_{CC} Lock-out below which re-initialization is required	2.4	–	V
V_{RST}	V_{CC} Low Voltage needed to ensure initialization will occur	0.8	–	V
t_{PD}	Duration of $V_{CC} \leq V_{RST}$	50	–	μs

Note:

1. V_{CC} ramp rate can be non-linear.

8.3 Hardware Reset

The RESET# input provides a hardware method of returning the device to the standby state.

During t_{RPH} the device will draw I_{CC5} current. If RESET# continues to be held Low beyond t_{RPH} , the device draws CMOS standby current (I_{CC4}). While RESET# is Low (during t_{RP}), and during t_{RPH} , bus transactions are not allowed.

A hardware reset will:

- cause the configuration registers to return to their default values,
- halt self-refresh operation while RESET# is low,

After RESET# returns High, the self-refresh operation will resume. Because self-refresh operation is stopped during RESET# Low, and the self-refresh row counter is reset to its default value, some rows may not be refreshed within the required array refresh interval per [Table 5.8, Array Refresh Interval per Temperature](#). This may result in the loss of DRAM array data during or immediately following a hardware reset. The host system should assume DRAM array data is lost after a hardware reset and reload any required data.

Figure 8.4 Hardware Reset Timing Diagram

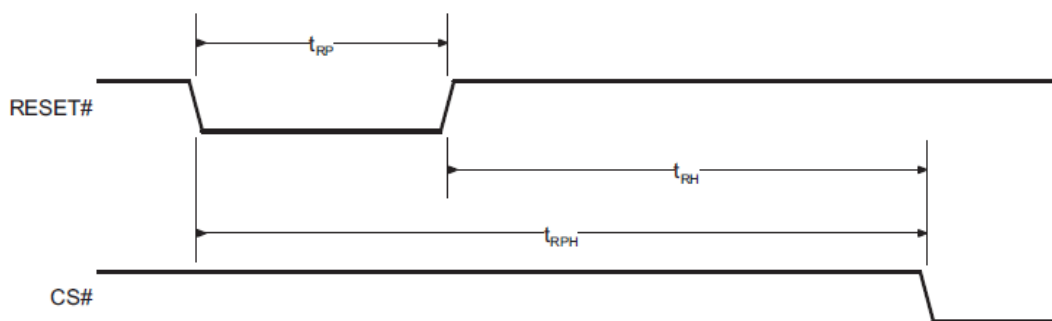


Table 8.4 Power Up and Reset Parameters

Parameter	Description	Min	Max	Unit
t_{RP}	RESET# Pulse Width	200	—	ns
t_{RH}	Time between RESET# (high) and CS# (low)	200	—	ns
t_{RPH}	RESET# Low to CS# Low	400	—	ns

9. ELECTRICAL CHARACTERISTICS

9.1 ABSOLUTE MAXIMUM RATINGS ⁽³⁾

Parameter	Description
Storage Temperature	-65°C to +150°C
Ambient temperature with power applied	-65°C to +135°C
Voltage with Respect to Ground on All Pins ⁽¹⁾	-0.5V to V _{CC} / V _{CCQ} + 0.5V
Voltage on V _{CC} supply relative to Ground	-0.5V to V _{CC} + 0.5V
Voltage on V _{CCQ} supply relative to Ground	-0.5V to V _{CCQ} + 0.5V
Output Short circuit current ⁽²⁾	100mA
Electrostatic Discharge Voltage (Human Body Model, ANSI/ESDA/JEDEC JS-001)	-2000V to +2000V

Notes:

1. Minimum DC voltage on input or I/O signal is -1.0V. During voltage transitions, input or I/O signals may undershoot V_{SS} to -1.0V for periods of up to 20ns. Maximum DC voltage on input or I/O signals is V_{CC}+1.0V. During voltage transitions, input or I/O signals may overshoot to V_{CC} + 1.0V for periods up to 20ns.
2. No more than one output may be shorted to ground at a time. Duration of the short circuit should not be greater than one second.
3. Stresses above those listed under "Absolute maximum ratings" may cause permanent damage to the device. This is a stress rating only; functional operation of the device or any other conditions above those indicated in the operational sections of the datasheet is not implied. Exposure of the device to absolute rating conditions for extended period may affect device reliability.

9.2 Latch up Characteristics

Description	Min	Max	Unit
Input voltage with respect to V _{SSQ} on all input only	- 1.0	V _{CCQ} + 1.0	V
Input voltage with respect to V _{SSQ} on all I/O connections	-1.0	V _{CCQ} + 1.0	V
V _{CCQ} Current	-100	+100	mA

9.3 Operating Ranges

Operating ranges define those limits between which the functionality of the device is guaranteed.

9.3.1 Temperature Ranges

Parameter	Symbol	Device	Spec		Unit
			Min	Max	
Ambient Temperature	T_A	Industrial (I)	-40	85	°C
		Automotive, Grade A1	-40	85	
		Automotive, Grade A2	-40	105	

9.3.2 Power Supply Voltages

1.8 V V_{CC} Power Supply	1.7V to 1.95V
3.0 V V_{CC} Power Supply	2.7V to 3.6V

9.3.3 Input Signal Overshoot

Minimum DC voltage on input or I/O signal is -1.0V for 1.8V device, and -2.0V for 3.0V device. During voltage transitions, input or I/O signals may undershoot V_{SS} to -1.0V or -2.0V for periods of up to 20ns. See figure 9.1. Maximum DC voltage on input or I/O signals is $V_{CC}+1.0V$ for 1.8V device, and $V_{CC}+2.0V$ for 3.0V device. During voltage transitions, input or I/O signals may overshoot to $V_{CC} + 1.0V$ or $V_{CC} + 2.0V$ for periods up to 20ns. See Figure 9.2.

Figure 9.1 Maximum Negative Overshoot Waveform for 1.8V device


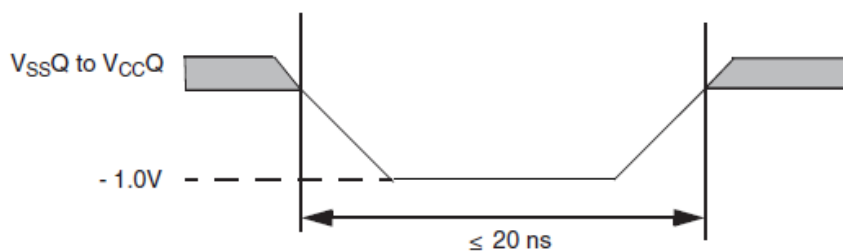


Figure 9.2 Maximum Positive Overshoot Waveform for 1.8V device

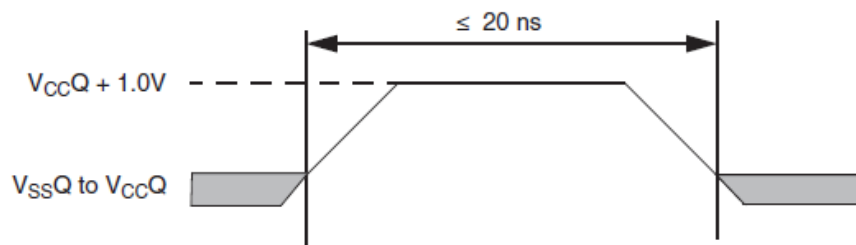

9.4 DC Characteristics

Table 9.1 DC Characteristics (CMOS Compatible)

Parameter	Description	Test Conditions		Value			Unit
				Min	Typ ⁽¹⁾	Max	
ILI1	Input Leakage Current 3.0 V Device Reset Signal High Only	VIN = VSS to VCC, VCC = VCC max		-	-	+/-20	μA
ILI2	Input Leakage Current 1.8 V Device Reset Signal High Only	VIN = VSS to VCC, VCC = VCC max		-	-	+/-10	
ILI3	Input Leakage Current 3.0 V Device Reset Signal Low Only ⁽²⁾	VIN = VSS to VCC, VCC = VCC max		-	-	40	
ILI4	Input Leakage Current 1.8 V Device Reset Signal Low Only ⁽²⁾	VIN = VSS to VCC, VCC = VCC max		-	-	40	
ICC1	VCC Active Read Current	CS# = VSS, @250 MHz, VCC = 1.95V		-	35	40	mA
		CS# = VSS, @200 MHz, VCC = 3.6V		-	30	35	
ICC2	VCC Active Write Current	CS# = VSS, @250 MHz, VCC = 1.95V		-	35	40	
		CS# = VSS, @200 MHz, VCC = 3.6V		-	30	35	
ICC4I	VCC Standby Current (−40 °C to +85 °C)	CS# = VCC, VCC = VCC max	Full array	-	-	1500	μA
			Top/Bot 1/2 array	-	-	1200	
			Top/Bot 1/4 array	-	-	1000	
			Top/Bot 1/8 array	-	-	800	
ICC4IP	VCC Standby Current (−40 °C to +105 °C)		Full array	-	-	1800	
			Top/Bot 1/2 array	-	-	1600	
			Top/Bot 1/4 array	-	-	1400	
			Top/Bot 1/8 array	-	-	1200	
ICC5	Reset Current	CS# = VIH, RESET# = VIL, VCC = VCC max		-	1	2	mA
ICC6	Active Clock Stop Current (−40 °C to +85 °C)	CS# = VIL, RESET# = VIH, VCC = VCC max		-	10	20	
	Active Clock Stop Current (−40 °C to +105 °C)	CS# = VIL, RESET# = VIH, VCC = VCC max		-		25	
ICC7	VCC Current during power up	CS# = VCC, VCC = VCC max, VCC = VCCQ = 1.95V or 3.6 ⁽¹⁾		-	-	80	
IDPD	Deep Power Down Current (−40 °C to +85 °C)	CS# = VCC, VCC = VCC max		-	30	50	μA
	Deep Power Down Current (−40 °C to +105 °C)			-		80	

Table 9.1 DC Characteristics (Continued)

Parameter	Description	Test Conditions		Value			Unit
				Min	Typ ⁽¹⁾	Max	
IHS ⁽¹⁾	HS Sleep Current (–40 °C to +85 °C)	CS# = V _{CC} , V _{CC} = V _{CC} max	Full array	-	-	800	μA
			Top/Bot 1/2 array	-	-	600	
			Top/Bot 1/4 array	-	-	500	
			Top/Bot 1/8 array	-	-	400	
	HS Sleep Current (–40 °C to +105 °C)		Full array	-	-	1000	
			Top/Bot 1/2 array	-	-	800	
			Top/Bot 1/4 array	-	-	600	
			Top/Bot 1/8 array	-	-	500	
V _{IL}	Input Low Voltage	-	– 0.5	-	0.30 x V _{CC}	V	
V _{IH}	Input High Voltage	-	0.70 x V _{CC}	-	V _{CC} + 0.3	V	
V _{OL}	Output Low Voltage	I _{OL} = 100 μA for DQ [7:0]	-	-	0.15 x V _{CC}	V	
V _{OH}	Output High Voltage	I _{OH} = 100 μA for DQ [7:0]	0.85 x V _{CC}	-	–	V	

Notes:

1. Not 100% tested.
2. RESET# low initiates exit from DPD state or hybrid state and initiates the draw of I_{CC5} reset current, making I_{L1} during Reset# Low insignificant.

9.5 Capacitance Characteristics

Table 9.2 Capacitance Characteristics


Description	Parameter	Min	Max	Unit
Input Capacitance (CK, CK#, CS#)	CI	3.0	4.5	pF
Delta Input Capacitance (CK, CK#)	CID	-	0.25	pF
Output Capacitance (RWDS)	CO	3.0	4.0	pF
IO Capacitance (DQx)	CIO	3.0	4.0	pF
IO Capacitance Delta (DQx)	CIOD	-	0.5	pF

Notes:

1. These values are guaranteed by design and are tested on a sample basis only.
2. Contact capacitance is measured according to JEP147 procedure for measuring capacitance using a vector network analyzer. V_{CC} , V_{CCQ} are applied and all other signals (except the signal under test) floating. DQ's should be in the high impedance state.
3. The capacitance values for the CK, RWDS and DQx signals must have similar capacitance values to allow for signal propagation time matching in the system. The capacitance value for CS# is not as critical because there are no critical timings between CS# going active (Low) and data being presented on the DQs bus.

10. Timing Specifications

10.1 Key to Switching Waveforms

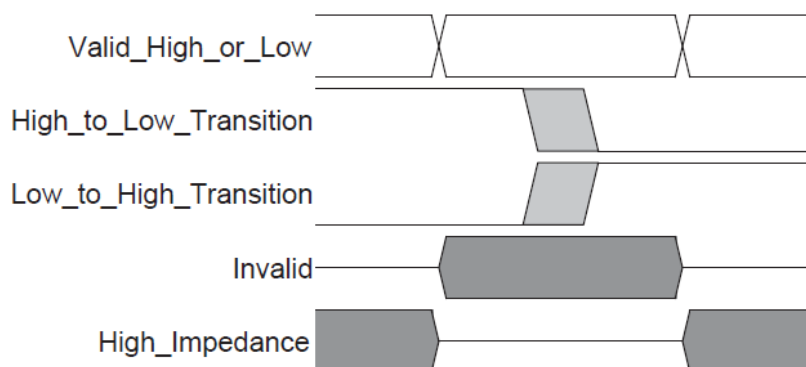

10.2 AC Test Conditions

Figure 10.1 Test Setup





Table 10.1 Test Specification ⁽²⁾

Parameter	All Speeds	Unit
Output Load Capacitance, C_L	15	pF
Minimum Input Rise and Fall Slew Rates (1.8 V) ⁽¹⁾	1.13	V/ns
Minimum Input Rise and Fall Slew Rates (3.0 V) ⁽¹⁾	2.06	V/ns
Input Pulse Levels	0 - V_{CCQ}	V
Input timing measurement reference levels	$V_{CCQ}/2$	V
Output timing measurement reference levels	$V_{CCQ}/2$	V

Notes:

1. All AC timings assume this input slew rate.
2. Input and output timing is referenced to $V_{CCQ}/2$ or to the crossing of CK/CK#.

Figure 10.2 Input Waveforms and Measurement Levels ⁽¹⁾

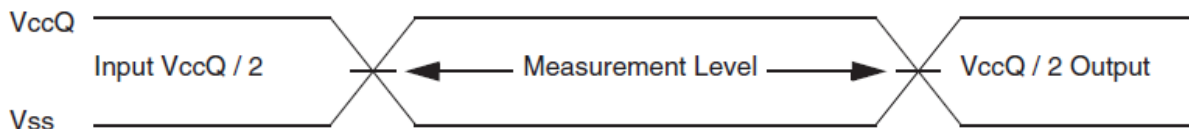

Note:

1. Input timings for the differential CK/CK# pair are measured from clock crossings.

10.3 CLK Characteristics

Figure 10.3 Clock Characteristics

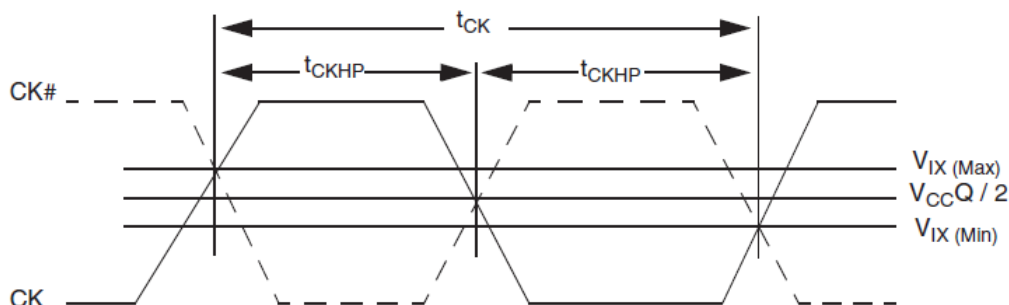
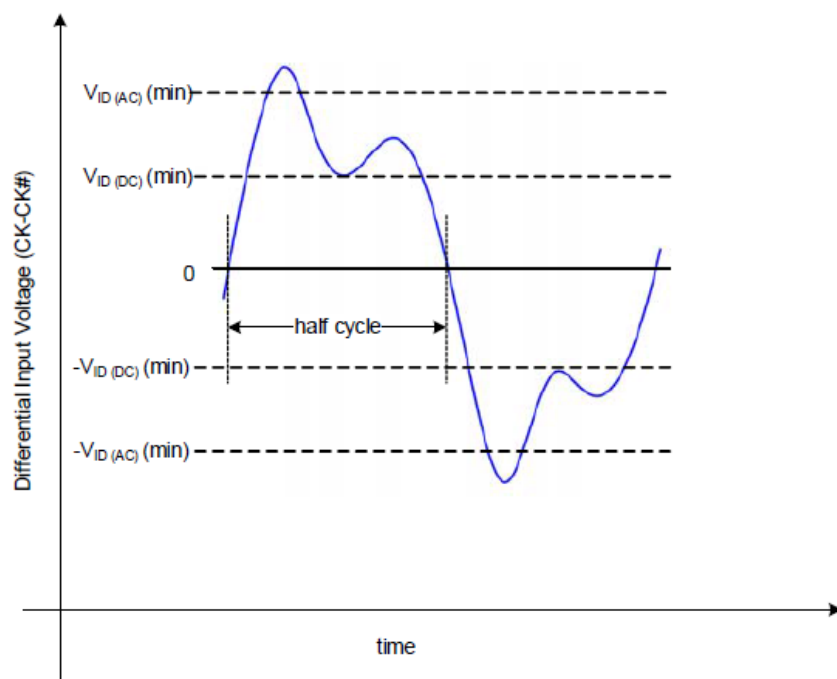


Table 10.2 Clock Timing ^(1,2,3)

Parameter	Symbol	250 MHz		200 MHz		166 MHz		Unit
		Min	Max	Min	Max	Min	Max	
CK Period	t_{CK}	4.0	-	5.0	-	6.0	-	ns
CK Half Period - Duty Cycle	t_{CKHP}	0.45	0.55	0.45	0.55	0.45	0.55	t_{CK}
CK Half Period at Frequency Min = $0.45t_{CK}$ Min Max = $0.55t_{CK}$ Min	t_{CKHP}	1.8	2.2	2.25	2.75	2.7	3.3	ns

Notes

1. Clock jitter of $\pm 5\%$ is permitted.
2. Minimum Frequency (Maximum t_{CK}) is dependent upon maximum CS# LOW time (t_{CSM}), Initial Latency and Burst Length.
3. CK and CK# input slew rate must be ≥ 1 V/ns (2 V/ns if measured differentially).

Figure 10.3 Differential clock (CK/CK#) input swing**Table 10.3** Clock AC/DC Electrical Characteristics^(1, 2)

Parameter	Symbol	Min	Max	Unit
DC Input Voltage	V_{IN}	-0.3	$V_{CCQ} + 0.3$	V
DC Input Differential Voltage	$V_{ID(DC)}$	$V_{CCQ} \times 0.4$	$V_{CCQ} + 0.6$	V
AC Input Differential Voltage	$V_{ID(AC)}$	$V_{CCQ} \times 0.6$	$V_{CCQ} + 0.6$	V
AC Differential Crossing Voltage	V_{IX}	$V_{CCQ} \times 0.4$	$V_{CCQ} \times 0.6$	V

Notes

1. V_{ID} is the magnitude of the difference between the input level on CK and the input level on CK#.
2. The value of V_{IX} is expected to equal $V_{CCQ}/2$ of the transmitting device and must track variations in the DC level of V_{CCQ} .

10.4 AC Characteristics

10.4.1 Read Transactions

Table 10.4 HyperRAM Specific Read Timing Parameters (1.8V)

Parameter		Symbol	250 MHz		200 MHz		Unit
			Min	M	Min	Max	
Chip Select High Between Transactions		t ^{CSHI}	6	–	6	–	ns
HyperRAM Read-Write Recovery Time		t ^{RWR}	35	–	35	–	ns
Chip Select Setup to next CK Rising Edge		t ^{CSS}	4	–	4	–	ns
Data Strobe Valid		t ^{DSV}	–	5	–	5	ns
Input Setup		t ^{IS}	0.5	–	0.5	–	ns
Input Hold		t ^{IH}	0.5	–	0.5	–	ns
HyperRAM Read Initial Access Time		t ^{ACC}	28	–	35	–	ns
Clock to DQs Low Z		t ^{DQLZ}	0	–	0	–	ns
CK transition to DQ Valid		t ^{CKD}	1	5.0	1	5.0	ns
CK transition to DQ Invalid		t ^{CKDI}	0	4.2	0	4.2	ns
Data Valid (t ^{DV} min = t ^{CKHP} min - t ^{CKD} max + t ^{CKDI} max)		t ^{DV}	1.0	–	1.45	–	ns
CK transition to RWDS Valid		t ^{CKDS}	1	5.0	1	5.0	ns
RWDS transition to DQ Valid		t ^{DSS}	–0.4	+0.4	–0.4	+0.4	ns
RWDS transition to DQ Invalid		t ^{DSH}	–0.4	+0.4	–0.4	+0.4	ns
Chip Select Hold After CK Falling Edge		t ^{CSH}	0	–	0	–	ns
Chip Select Inactive to RWDS High-Z		t ^{DSZ}	–	5	–	6	ns
Chip Select Inactive to DQ High-Z		t ^{OZ}	–	5	–	6	ns
Refresh Time		t ^{RFH}	28	–	35	–	ns
Chip Select Maximum Low Time	(- 40 °C to 85 °C)	t ^{CSM}	–	4.0	–	4.0	µs
	(- 40 °C to 105 °C)		–	1.0	–	1.0	

Table 10.5 HyperRAM Specific Read Timing Parameters (3.0V)

Parameter	Symbol	200 MHz		166 MHz		Unit
		Min	M	Min	Max	
Chip Select High Between Transactions	t _{CSHI}	6	–	6	–	ns
HyperRAM Read-Write Recovery Time	t _{RWR}	35	–	36	–	ns
Chip Select Setup to next CK Rising Edge	t _{CSS}	4	–	3	–	ns
Data Strobe Valid	t _{DSV}	–	6.5	–	12	ns
Input Setup	t _{IS}	0.5	–	0.6	–	ns
Input Hold	t _{IH}	0.5	–	0.6	–	ns
HyperRAM Read Initial Access Time	t _{ACC}	35	–	36	–	ns
Clock to DQs Low Z	t _{DQLZ}	0	–	0	–	ns
CK transition to DQ Valid	t _{CKD}	1	6.5	1	7.0	ns
CK transition to DQ Invalid	t _{CKDI}	0.5	5.7	0.5	5.6	ns
Data Valid (t _{DV} min = t _{CKHP} min - t _{CKD} max + t _{CKDI} max)	t _{DV}	1.45	–	1.3	–	ns
CK transition to RWDS Valid	t _{CKDS}	1	6.5	1	7.0	ns
RWDS transition to DQ Valid	t _{DSS}	–0.4	+0.4	–0.4	+0.4	ns
RWDS transition to DQ Invalid	t _{DSH}	–0.4	+0.4	–0.4	+0.4	ns
Chip Select Hold After CK Falling Edge	t _{CSH}	0	–	0	–	ns
Chip Select Inactive to RWDS High-Z	t _{DSZ}	–	6.5	–	7.0	ns
Chip Select Inactive to DQ High-Z	t _{OZ}	–	6.5	–	7.0	ns
Refresh Time	t _{RFH}	35	–	36	–	ns
Chip Select Maximum Low Time	t _{CSM}	(- 40 °C to 85 °C)	–	4.0	–	μs
		(- 40 °C to 105 °C)	–	1.0	–	

The diagram shows the timing relationship between the memory device and the host. The signals are:

- CS#**: Chip Select, active low.
- CK, CK#**: Clock signals.
- RWDS[1:0]**: Read/Write Data Strobe, active low.
- DQ[15:0]**: Data bus.

The timing parameters shown are:

- t_{RWR} : Read Write Recovery time.
- Additional Latency**: Time between the end of the Read Write Recovery and the start of the Access time.
- t_{ACC} : Access time.
- t_{OSV} : Output Setup time.
- t_{CKDS} : Clock-to-DQ Setup time.
- t_{ODS} : Output Delay time.
- t_{CKD} : Clock-to-DQ Delay time.

The RWDS[1:0] signal has a high state for 2x Latency Count and a low state for 1x Latency Count. The DQ[15:0] signal shows the data bus driving the memory, with the memory driving DQ[15:0] and RWDS[1:0].

[illegible]

1. tCKD and tCKDI parameters define the beginning and end position of data valid.
2. tDSS and tDSH define how early or late DQ may transition relative to RWDS. This is a potential skew between the CK to DQ delay tCKD and CK to RWDS delay tCKDS.
3. Since DQ and RWDS are the same output types, the tCKD, tCKDI, and tCKDS values track together (vary by the same ratio)

10.4.2 Write Transactions


Table 10.6 HyperRAM Specific Write Timing Parameters (1.8V)

Parameter		Symbol	250 MHz		200 MHz		Unit
			Min	M	Min	Max	
Read-Write Recovery Time		t_{RWR}	35	–	35	–	ns
Access Time		t_{ACC}	28	–	35	–	ns
Refresh Time		t_{RFH}	28	–	35	–	ns
RWDS Data Mask Valid		t_{DMV}	0	–	0	–	ns
Chip Select Maximum Low Time	(–40 °C to 85 °C)	t_{CSM}	–	4.0	–	4.0	μ s
	(–40 °C to +105 °C)		–	1.0	–	1.0	

Table 10.7 HyperRAM Specific Write Timing Parameters (3.0V)

Parameter		Symbol	200 MHz		166MHz		Unit
			Min	M	Min	Max	
Read-Write Recovery Time		t_{RWR}	35	–	36	–	ns
Access Time		t_{ACC}	35	–	36	–	ns
Refresh Time		t_{RFH}	35	–	36	–	ns
RWDS Data Mask Valid		t_{DMV}	0	–	0	–	ns
Chip Select Maximum Low Time	(–40 °C to 85 °C)	t_{CSM}	–	4.0	–	4.0	μ s
	(–40 °C to +105 °C)		–	1.0	–	1.0	


Figure 10.8 Write Timing Diagram — No Additional Latency

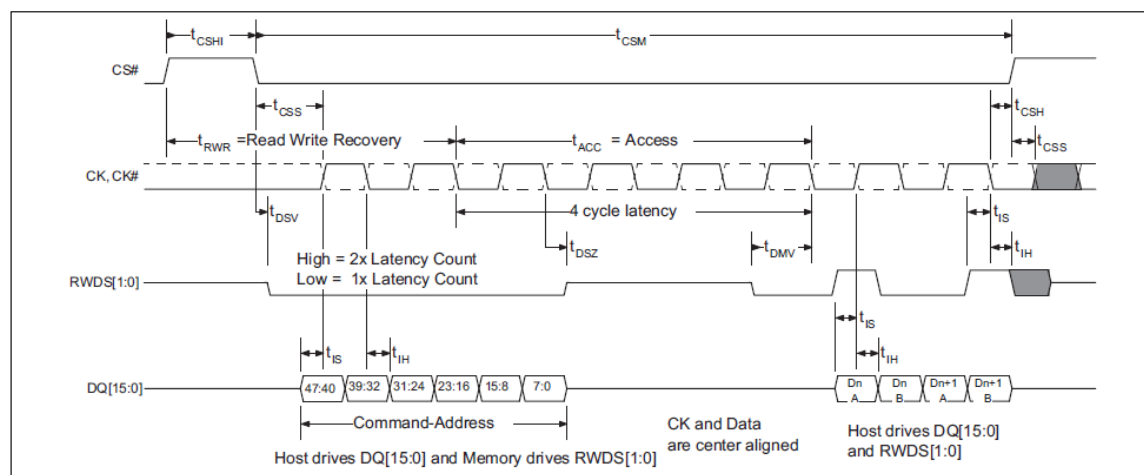

11. Physical Interface


11.1 FBGA 49-Ball 7 x 7 Array Footprint

Figure 11.1 49-Ball FBGA, 8 x 8 mm, 7x7 Ball Footprint, Top View

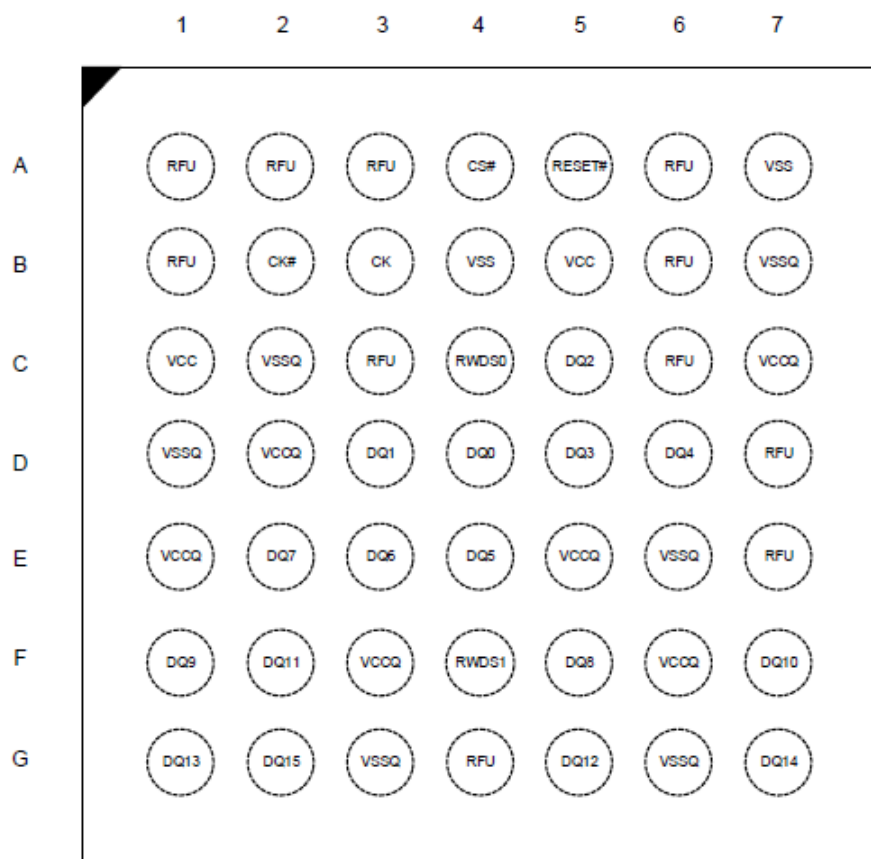

12. Package Information

12.1 49-BALL THIN PROFILE FINE PITCH BGA 8x8mm 7x7 BALL ARRAY

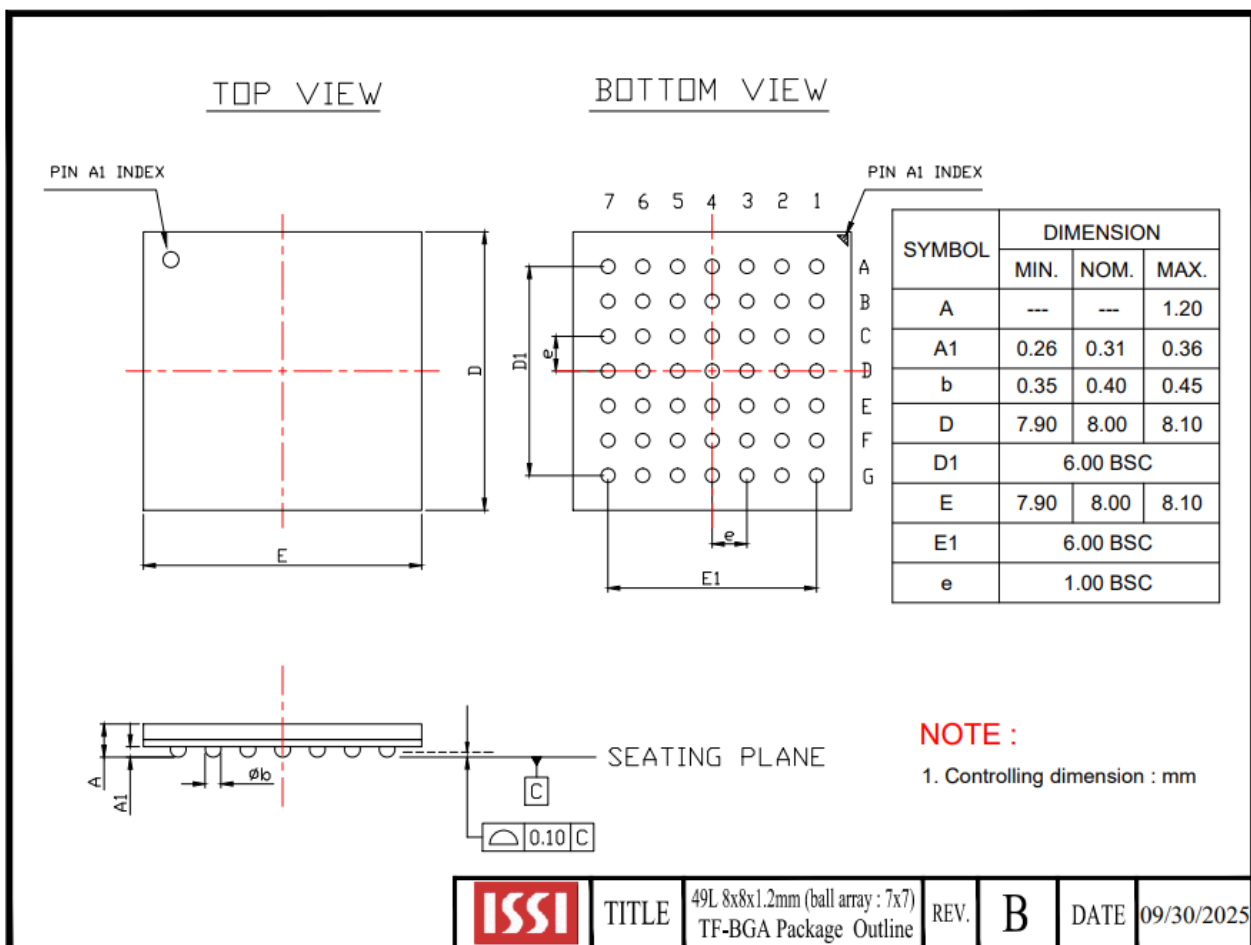

13. ORDERING INFORMATION - Valid Part Numbers

IS67 WVH 32M16 E ALL - 250 A L I

TEMPERATURE RANGE

I = Industrial (-40°C to +85°C)
A1 = Automotive Grade (-40°C to +85°C)
A2 = Automotive Grade (-40°C to +105°C)

PACKAGING CONTENT

L = Green Package (RoHS Compliant, Halogen-Free) and TSCA Compliant

PACKAGE Type

A = 49-ball TFBGA (8x8mm) 7x7 ball array

Frequency

250 = 250MHz
200 = 200MHz
166 = 166MHz

Voltage

ALL = 1.8V
BLL = 3.0V

Die Revision

E = Revision E

Density/Org.

32M16 = 512 Mb (32Mbx16)

Product Type

WVH = HyperRAM

BASE PART NUMBER

IS = Integrated Silicon Solution Inc.

66 = PSRAM

67 = Automotive PSRAM

Note:

1. Call Factory for other package options available

14. ORDERING TABLE

ALL: VDD = VDDQ = 1.7V~1.95V

Industrial Temperature Range: (-40 °C to +85 °C)

Config.	Frequency (MHz)	Order Part No.	Package
32Mx16	250	IS66WVH32M16EALL-250ALI	49-ball TFBGA, 7x7 Array
	200	IS66WVH32M16EALL-200ALI	49-ball TFBGA, 7x7 Array

Automotive A1 Temperature Range: (-40 °C to +85 °C)

Config.	Frequency (MHz)	Order Part No.	Package
32Mx16	250	IS67WVH32M16EALL-250ALA1	49-ball TFBGA, 7x7 Array
	200	IS67WVH32M16EALL-200ALA1	49-ball TFBGA, 7x7 Array

Automotive A2 Temperature Range: (-40 °C to +105 °C)

Config.	Frequency (MHz)	Order Part No.	Package
32Mx16	250	IS67WVH32M16EALL-250ALA2	49-ball TFBGA, 7x7 Array
	200	IS67WVH32M16EALL-200ALA2	49-ball TFBGA, 7x7 Array

BLL: VDD = VDDQ = 2.7V~3.6V

Industrial Temperature Range: (-40 °C to +85 °C)

Config.	Frequency (MHz)	Order Part No.	Package
32Mx16	200	IS66WVH32M16EBLL-200ALI	49-ball TFBGA, 7x7 Array
	166	IS66WVH32M16EBLL-166ALI	49-ball TFBGA, 7x7 Array

Automotive A1 Temperature Range: (-40 °C to +85 °C)

Config.	Frequency (MHz)	Order Part No.	Package
32Mx16	200	IS67WVH32M16EBLL-200ALA1	49-ball TFBGA, 7x7 Array
	166	IS67WVH32M16EBLL-166ALA1	49-ball TFBGA, 7x7 Array

Automotive A2 Temperature Range: (-40 °C to +105 °C)

Config.	Frequency (MHz)	Order Part No.	Package
32Mx16	200	IS67WVH32M16EBLL-200ALA2	49-ball TFBGA, 7x7 Array
	166	IS67WVH32M16EBLL-166ALA2	49-ball TFBGA, 7x7 Array